

---

# Yale UX Series

Seated Electric Tow Tractor

MT30UX / 3000KG



# MT30UX

The Yale® seated electric tow tractor MT30UX demonstrates intelligent ergonomics, reliable technology and energy efficient features to facilitate operational needs. The low-maintenance design promotes increased productivity and helps reduce operational costs.

## Productivity

- High-power maintenance free AC drive motor
- Impressive pulling performance
- Seamless travel and manoeuvrability
- Rear dual-position tow coupling
- Ergonomic layout to maximise operational efficiency and comfort
- Adjustable seat and steering column
- Multi function LCD dash display
- Automatic electro-magnetic parking brake

## Serviceability

- Easy access for fast and efficient servicing
- Simple, readily available components
- Computer based diagnostics not required

## Safety & Structural Design

- Operator Presence System (OPS)
- Non-slip, uncluttered floor plate
- Drive axle design and low centre of gravity enables excellent stability
- Emergency stop button
- Audible reverse alarm
- High quality, robust components
- Low noise level

## Optional Features

- Battery side extraction
- Keyless key switch (password)
- Blue light and strobe light
- Rear view mirrors
- Paper document storage compartment

Model	Measurement	MT30UX
Power Type		36-Volt
Operator Type		Seated
Rated Capacity	kg	3000
Drawbar Pull, 60min rating	N	750
Max Drawbar Pull, 5min rating	N	☞
Wheelbase	L1 (mm)	1055
Rear Load Distance	L2 (mm)	382
Service Weight	kg	780
Axle Loading, unladen front / rear	kg	310 / 470
Front, Tyre size / type (No. of Wheels)		15x4.5-8 Solid (1)
Rear, Tyre size / type (No. of Wheels)		15x4.5-8 Solid (2)
Wheel Tread, front	mm	n/a
Wheel Tread, rear	W1 (mm)	860
Seat Height / STD	h3 (mm)	910
Coupling Height	h1 / h2 (mm)	280 / 350
Overall Length	L (mm)	1720
Overall Width	W (mm)	968
Overall Height (excluding cab)	H (mm)	1270
Approach Angle	$\alpha 1$ (°)	$\geq 54$
Departure Angle	$\alpha 2$ (°)	$\geq 37$
Min Ground Clearance	X (mm)	90
Turning Radius	Wa (mm)	1490
Travel Speed, unladen	km/h	10
Travel Speed, laden	km/h	7
Gradeability, laden / unladen	%	7 / 12
Service Brake / Parking Brake		Hydraulic / Electromagnetic
Drive Control		AC
Drive Motor Rating *S2 60 min	kW	3
Battery Ampere Hours	Ah	250
Battery Weight	kg	202
Sound level at the drivers ear according to EN / DIN 12053	dB (A)	68




Easy Service Access via Back Cover



Ergonomic Operator Compartment



Informative LCD Dash Display

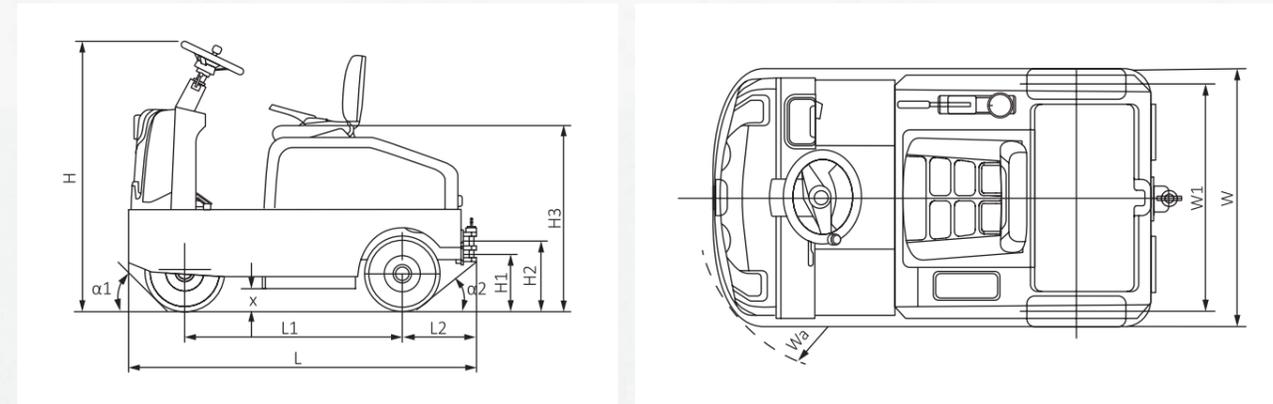

# Yale® Dealers

Contact your nearest  
Yale® Dealership by visiting  
[www.yale.com.au](http://www.yale.com.au)



Contact your local Yale® Dealer

#### Yale Pacific

1 Bullecourt Avenue, Milperra NSW, Australia 2214

Tel: +61 (2) 9795 3800 | Fax: +61 (2) 9792 8484

[yale.com/pacific/en-au](http://yale.com/pacific/en-au)

#### Yale Asia

16 Tuas Avenue 20, Singapore 638827

Tel: +65 6863 3387 | Fax: +65 6863 3349

[yale.com/asia/en-sg](http://yale.com/asia/en-sg)

Yale, and PEOPLE. PRODUCTS. PRODUCTIVITY are trademarks of Hyster-Yale Group, Inc.

 is a registered copyright of Hyster-Yale Group, Inc.

©Yale Asia Pacific 2020. All rights reserved. Specifications and details in this brochure are subject to change without prior notification.

[www.yale.com.au](http://www.yale.com.au)



Manufactured in our own ISO 9001 and 14001 Registered Facilities

Trucks may be shown with optional equipment.

**Yale®**  
People. Products. Productivity.™