



MTC10-15

SPEC SHEET


1,000 - 1,500 kg

MTC Series

Very Narrow Aisle
Turret Truck



TRUCK DIMENSIONS – MTC SERIES

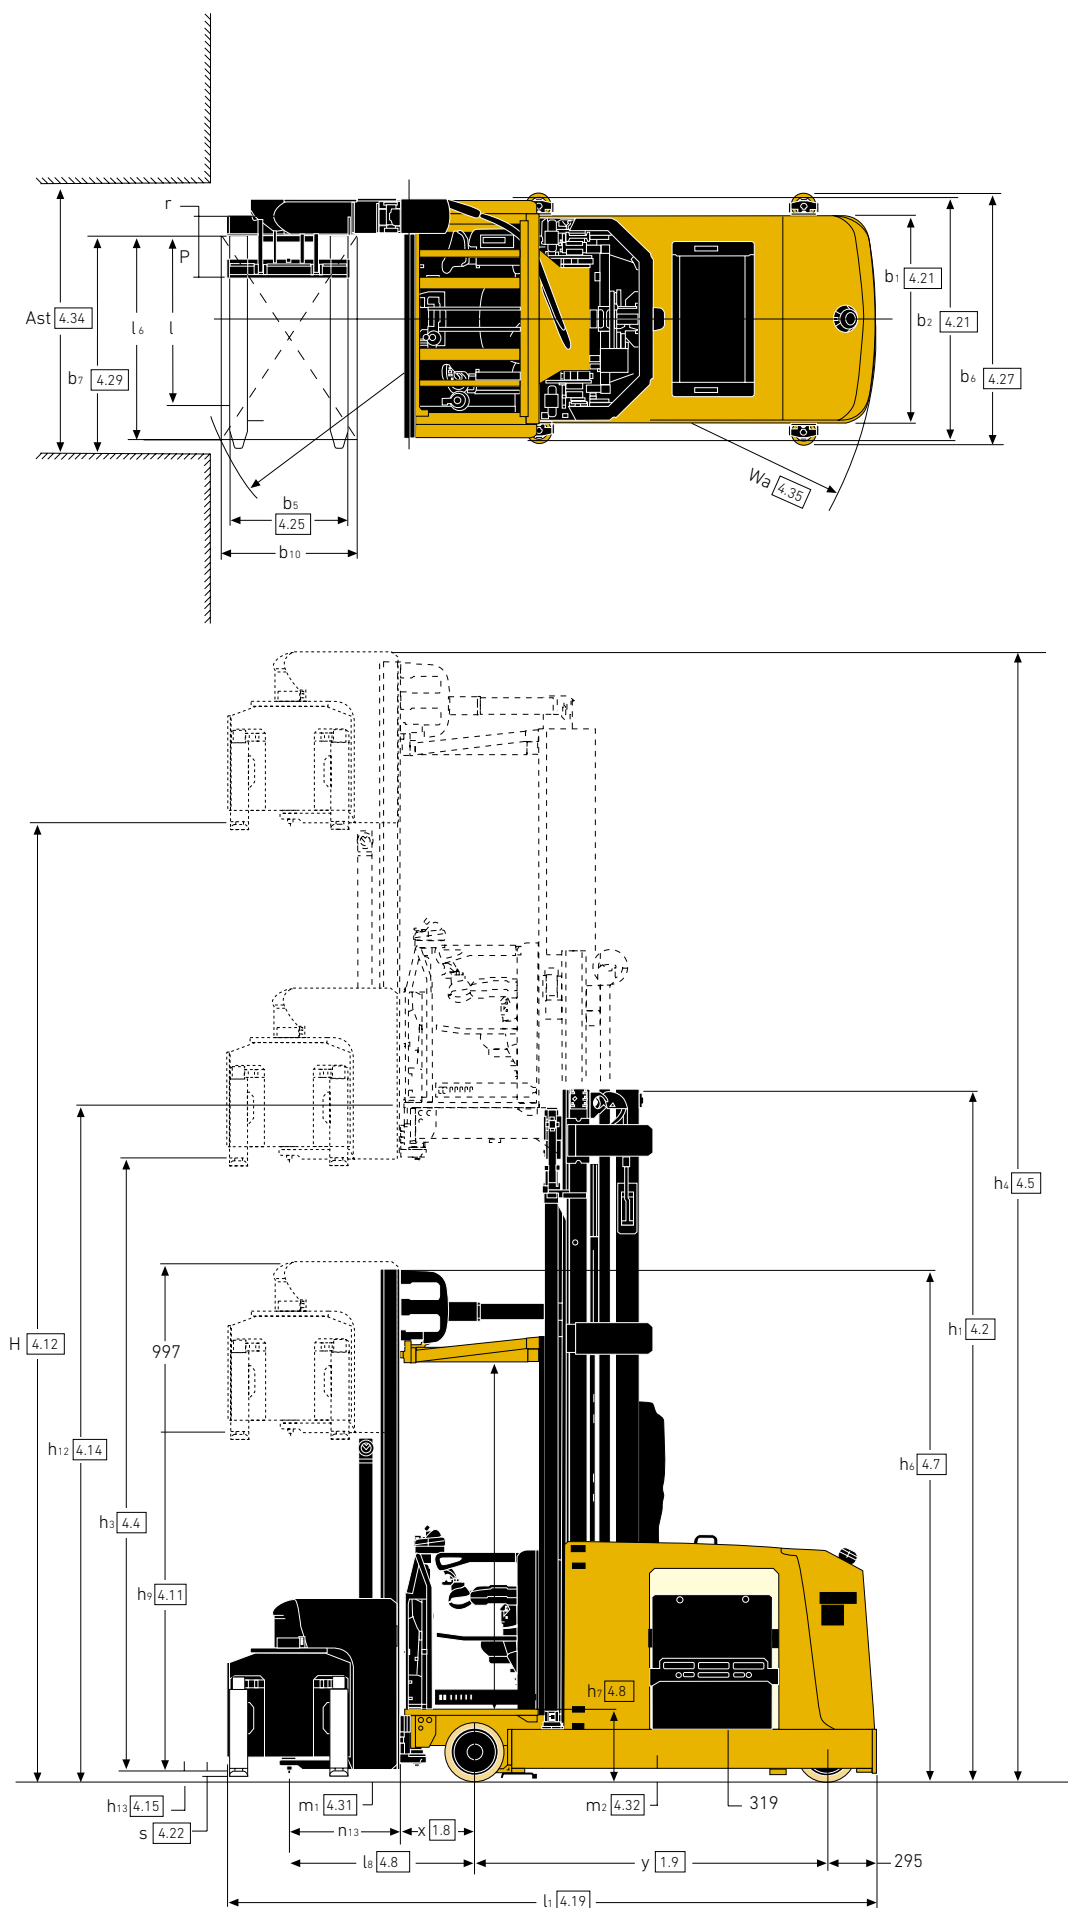

VDI 2198 – GENERAL SPECIFICATIONS – MTC SERIES

GENERAL	1.1	Manufacturer		Yale			
	1.2	Model designation		MTC10	MTC13	MTC13 80	MTC13 LWB
	1.3	Drive		Battery			
	1.4	Operator type		Seated / Stand-on			
	1.5	Rated capacity/Rated load	Q (t)	1	1.3		
	1.6	Load centre distance	c (mm)	600			
	1.8	Load distance, centre of drive axle to fork	x (mm)	431 ⁽²⁾			
	1.9	Wheelbase	y (mm)	1783	1943		2063
	WEIGHT	2.1	Service weight ⁽¹⁾	Kg	6388	7077	8014
2.2		Axle loading, laden front/rear ⁽¹⁾	Kg	5468/1920	6466/1911	7061/2252	7216/2647
2.3		Axle loading, unladen front/rear ⁽¹⁾	Kg	3860/2528	4390/2686	4985/3028	5184/3378
TYRES	3.1	Tyres front/rear		Polyurethane			
	3.2	Tyre size, front	ø (mm x mm)	350 x 140			
	3.3	Tyre size, rear	ø (mm x mm)	400 x 160			406 x 178
	3.5	Wheels, number front/rear (x = driven wheels)		2 / 1(x)	2 / 1(x)	2 / 1(x)	2 / 1(x)
	3.6	Tread, front	b ₁₀ (mm)	1080 - 1285 - 1435 - 1585		1080 - 1285 - 1435 - 1585	
DIMENSIONS	4.2	Height, mast lowered	h ₁ (mm)	3290	2490	3990	4240
	4.4	Lift	h ₃ (mm)	4280	3570	8070	8820
	4.5	Height, mast extended	h ₄ (mm)	7338-7498-8078-8358	6628-6788-7368-7648	11128-11288-11868-12148	11878-12038-12618-12898
	4.7	Height of overhead guard (cabin)	h ₆ (mm)	3058 - 3218 - 3798 - 4078			
	4.8	Seat height relating to SIP/stand height	h ₇ (mm)	425			
	4.11	Additional Lift	h ₉ (mm)	1980 - 2140 - 2720 - 3000			
	4.14	Stand height, elevated	h ₁₂ (mm)	4705	3995	8495	9245
	4.15	Height, lowered	h ₁₃ (mm)	80			
	4.19	Overall length ⁽⁶⁾ ⁽⁸⁾	l ₁ (mm)	3538 ⁽²⁾	3698 ⁽²⁾		3818 ⁽²⁾
	4.20	Length to face of forks ⁽⁹⁾	l ₂ (mm)	4484 ⁽²⁾	4644 ⁽²⁾		4764 ⁽²⁾
	4.21	Overall width	b ₁ /b ₂ (mm)	1220 / 1220 - 1425 -1575 - 1725			
	4.22	Fork dimensions ⁽⁴⁾	s/e/l (mm)	45 / 100 / 1200			
	4.23	Fork carriage ISO 2328, class/type A, B		No			
	4.24	Fork-carriage width	b ₃ (mm)	720			
	4.25	Distance between fork-arms	b ₅ (mm)	508 ÷ 720	508 ÷ 720	508 ÷ 720	508 ÷ 720
	4.27	Width across guide rollers	b ₆ (mm)	1275 - 1475 - 1625 - 1775			
	4.29	Reach, lateral	b ₇ (mm)	990 - 1190 - 1340 - 1490			
	4.30	Reach, lateral from vehicle centreline	b ₈ (mm)	390 - 490 - 565 - 640			
	4.31	Ground clearance, laden, below mast	m ₁ (mm)	70			
	4.32	Ground clearance, center of wheelbase	m ₂ (mm)	75			
	4.34.2	Aisle width for pallets 800mm x 1200mm lengthwise ⁽⁵⁾	Ast (mm)	1600			
	4.35	Turning radius	Wa (mm)	2100	2250		2370
	4.38	Distance to swiveling-fork pivot ⁽⁶⁾	l ₈ (mm)	1101 ⁽²⁾			
	4.39	Lenght rotator arm	n (mm)	670			
	4.40	Width traverse frame	B (mm)	1200 - 1400 - 1550 - 1700			
	4.41	Lost rotator width	F (mm)	210			
	4.42	Transfer aisle width pallet 1200 x 1200 mm ⁽⁷⁾	Au (mm)	4140 ⁽²⁾	4295 ⁽²⁾		4410 ⁽²⁾
PERFORMANCE	5.1	Travel speed, laden/unladen	km/h	9.9 / 10	10.4 / 10.5		
	5.2	Lift speed, laden/unladen	m/s	0.33 / 0.42		0.36 / 0.42	0.33 / 0.42
	5.3	Lowering speed, laden/unladen	m/s	0.50 / 0.50		0.60 / 0.60	0.50 / 0.50
	5.4	Reaching speed, laden/unladen	m/s	0.19 / 0.20			
	5.7	Gradeability, laden/unladen	%	6			
	5.10	Service brake		Electric / mechanical			
ELECTRIC	6.1	Drive motor, S2 60 minute rating	kW	7.5		8	7.5
	6.2	Lift motor, S3 15% rating	kW	2 x 15.7		2 x 19.1	2 x 15.7
	6.3	Battery according to DIN 43531/35/36 A,B,C, no		B		A	B
	6.4	Battery voltage/nominal capacity K5	(V)/(Ah)	48/560 ⁽¹⁶⁾	48/700 ⁽¹¹⁾	80/420 ⁽¹²⁾	48/1085 ⁽¹⁷⁾
	6.5	Battery weight ⁽¹⁰⁾	Kg	939	1119	1274	1577
OTHER	8.1	Type of drive unit		AC ~ MOSFET			
	10.1	Operating pressure for attachments	bar	150			
	10.2	Oil volume for attachments	l/min	6			
	10.7	Sound pressure level at the driver's seat	dB (A)	< 65			

(1) Service weight referred to h₉=1980mm , b₁-b₂=1220mm , b=1200mm

(2) +76mm for 3STG mast with h₇=670 (C1.0, C1.3, C1.380, C1.3LWB, C1.5SWB / MTC10, MTC13, MTC1380, MTC13LWB, MTC15SWB)

(3) +150mm for 3STG mast with h₇=670 mm (C1.5MWB, C1.5LWB / MTC15MWB, MTC15LWB)

(4) Available fork length 800 - 1000 - 1066 - 1200mm

(5) Ast : load dimension function

(6) -100mm for h₇=570mm

(7) Au = R + Wa + 200mm

(8) Forks nested

(9) Forks forward = 1200mm fork length

(10) These values may vary of +/- 5%

(11) Available battery 48V / 775Ah (1135kg), 48V / 840Ah (1306kg), 48V / 930Ah (1368kg)

VDI 2198 – GENERAL SPECIFICATIONS – MTC SERIES

GENERAL	1.1	Manufacturer		Yale		
	1.2	Model designation		MTC15 SWB	MTC15 MWB	MTC15 LWB
	1.3	Drive		Battery		
	1.4	Operator type		Seated / Stand-on		
	1.5	Rated capacity/Rated load	Q (t)	1.5		
	1.6	Load centre distance	c (mm)	600		
	1.8	Load distance, centre of drive axle to fork	x (mm)	431 ⁽²⁾		
	1.9	Wheelbase	y (mm)	2063	2193	2388
	WEIGHT	2.1	Service weight ⁽¹⁾	Kg	8623	9454
2.2		Axle loading, laden front/rear ⁽¹⁾	Kg	7615/2517	8153/2800	8482/3180
2.3		Axle loading, unladen front/rear ⁽¹⁾	Kg	5272/3351	5899/3644	6207/3955
TYRES	3.1	Tyres front/rear		Polyurethane		
	3.2	Tyre size, front	ø (mm x mm)	350 x 140		
	3.3	Tyre size, rear	ø (mm x mm)	406 x 178		
	3.5	Wheels, number front/rear (x = driven wheels)		2 / 1(x)		
	3.6	Tread, front	b ₁₀ (mm)	1080 - 1285 - 1435 - 1585		
DIMENSIONS	4.2	Height, mast lowered	h ₁ (mm)	4240	4740	5240
	4.4	Lift	h ₃ (mm)	8820	10140	11640
	4.5	Height, mast extended	h ₄ (mm)	11878 - 12038 - 12618 - 12898	13198 - 13358 - 13938 - 14218	14698 - 14858 - 15438 - 15718
	4.7	Height of overhead guard (cabin)	h ₆ (mm)	3058 - 3218 - 3798 - 4078		
	4.8	Seat height relating to SIP/stand height	h ₇ (mm)	425		
	4.11	Additional Lift	h ₉ (mm)	1980 - 2140 -2720 - 3000		
	4.14	Stand height, elevated	h ₁₂ (mm)	9245	10565	12065
	4.15	Height, lowered	h ₁₃ (mm)	80		
	4.19	Overall length ⁽⁶⁾ ⁽⁸⁾	l ₁ (mm)	3818 ⁽²⁾	3948 ⁽³⁾	4143 ⁽³⁾
	4.20	Length to face of forks ⁽⁹⁾	l ₂ (mm)	4764 ⁽²⁾	4894 ⁽³⁾	5089 ⁽³⁾
	4.21	Overall width	b ₁ /b ₂ (mm)	1220 / 1220 - 1425 -1575 - 1725		
	4.22	Fork dimensions ⁽⁴⁾	s/e/l (mm)	45 / 100 / 1200		
	4.23	Fork carriage ISO 2328, class/type A, B		No		
	4.24	Fork-carriage width	b ₃ (mm)	720		
	4.25	Distance between fork-arms	b ₅ (mm)	508 ÷ 720		
	4.27	Width across guide rollers	b ₆ (mm)	1275 - 1475 - 1625 - 1775		
	4.29	Reach, lateral	b ₇ (mm)	990 - 1190 - 1340 - 1490		
	4.30	Reach, lateral from vehicle centreline	b ₈ (mm)	390 - 490 - 565 - 640		
	4.31	Ground clearance, laden, below mast	m ₁ (mm)	70		
	4.32	Ground clearance, center of wheelbase	m ₂ (mm)	75		
	4.34.2	Aisle width for pallets 800mm x 1200mm lengthwise ⁽⁵⁾	Ast (mm)	1600		
	4.35	Turning radius	Wa (mm)	2370	2495	2685
	4.38	Distance to swiveling-fork pivot ⁽⁶⁾	l ₈ (mm)	1101 ⁽²⁾	1101 ⁽³⁾	
	4.39	Lenght rotator arm	n (mm)	670		
	4.40	Width traverse frame	B (mm)	1200 - 1400 - 1550 - 1700		
	4.41	Lost rotator width	F (mm)	210		
	4.42	Transfer aisle width pallet 1200 x 1200 mm ⁽⁷⁾	Au (mm)	4410 ⁽²⁾	4540 ⁽³⁾	4735 ⁽³⁾
PERFORMANCE	5.1	Travel speed, laden/unladen	km/h	10.4 / 10.5		
	5.2	Lift speed, laden/unladen	m/s	0.35 / 0.4		
	5.3	Lowering speed, laden/unladen	m/s	0.60 / 0.60		
	5.4	Reaching speed, laden/unladen	m/s	0.19 / 0.20		
	5.7	Gradeability, laden/unladen	%	6		
	5.10	Service brake		Electric / mechanical		
	ELECTRIC	6.1	Drive motor, S2 60 minute rating	kW	8	
6.2		Lift motor, S3 15% rating	kW	2 x 19.1		
6.3		Battery according to DIN 43531/35/36 A,B,C, no		A		
6.4		Battery voltage/nominal capacity K5	(V)/(Ah)	80/560 ⁽¹³⁾	80/700 ⁽¹⁴⁾	80/840 ⁽¹⁵⁾
6.5		Battery weight ⁽¹⁰⁾	Kg	1547	1872	2206
OTHER	8.1	Type of drive unit		AC ~ MOSFET		
	10.1	Operating pressure for attachments	bar	150		
	10.2	Oil volume for attachments	l/min	6		
	10.7	Sound pressure level at the driver's seat	dB (A)	< 65		

(12) Available battery 80V / 465Ah (1340kg)

(13) Available battery 80V / 620Ah (1630kg), Li-ion battery 80V / 432Ah (1558kg)

(14) Available battery 80V / 775Ah (2004kg), Li-ion battery 80V / 720Ah (1863kg)

(15) Available battery 80V / 930Ah (2295kg), Li-ion battery 80V / 576Ah (2178kg), Li-ion battery 80V / 720Ah (2178kg)

(16) Available battery 48V / 620Ah (950kg), 48V / 700Ah (1119kg), 48V / 775Ah (1165kg), Li-ion battery 48V / 360Ah (937kg), Li-ion battery 48V / 432Ah (937kg), Li-ion battery 48V / 576Ah (1119kg)

(17) Available Li-ion battery 80V / 720Ah (1468kg)

All values are nominal values and they are subject to tolerances.

MAST DIMENSIONS – MTC10, MTC13, MTC13 80, MTC13 LWB, MTC15 SWB

Maximum fork height H (mm)	Overall lowered height h ₁ (mm)	Overall lowered height (Mini Mast) h ₄ (mm)	Free lift h ₂ (mm)	Main lift h ₃ (mm)	Extended height with load backrest h ₄ (mm)	Extended height h ₄ (mm)	Platform height h ₁₂ (mm)
2-Stage Triform							
5235	2740	3020	1980	3180	6237	6200	3605
5735	2990	3020	1980	3680	6737	6700	4105
6235	3240	3020	1980	4180	7237	7200	4605
6335	3290	3020	1980	4280	7337	7300	4705
6735	3490	3020	1980	4680	7737	7700	5105
6935	3590	3020	1980	4880	7937	7900	5305
7235	3740	3020	1980	5180	8237	8200	5605
7535	3890	3020	1980	5480	8537	8500	5905
7735	3990	3020	1980	5680	8737	8700	6105
8035*	4140*	3020*	1980*	5980*	9037*	9000*	6405*
8135*	4190*	3020*	1980*	6080*	9137*	9100*	6505*
8235*	4240*	3020*	1980*	6180*	9237*	9200*	6605*
8535*	4390*	3020*	1980*	6480*	9537*	9500*	6905*
8735*	4490*	3020*	1980*	6680*	9737*	9700*	7105*
9035*	4640*	3020*	1980*	6980*	10037*	10000*	7405*
9235*	4740*	3020*	1980*	7180*	10237*	10200*	7605*
9335*	4790*	3020*	1980*	7280*	10337*	10300*	7705*
9535*	4890*	3020*	1980*	7480*	10537*	10500*	7905*
9735*	4990*	3020*	1980*	7680*	10737*	10700*	8105*
9915*	5240*	3020*	1980*	7860*	10917*	10880*	8285*
10215*	5390*	3020*	1980*	8160*	11217*	11180*	8585*
10515*	5540*	3020*	1980*	8460*	11517*	11480*	8885*
10915*	5740*	3020*	1980*	8860*	11917*	11880*	9285*
11415*	5990*	3020*	1980*	9360*	12417*	12380*	9785*
11615*	6090*	3020*	1980*	9560*	12617*	12580*	9985*
11915*	6240*	3020*	1980*	9860*	12917	12880*	10285*
12315*	6440*	3020*	1980*	10260*	13317	13280*	10685*

* Except MTC10

MAST DIMENSIONS – MTC13, MTC13 80, MTC13 LWB, MTC15 SWB

Maximum fork height H (mm)	Overall lowered height h ₁ (mm)	Overall lowered height (Mini Mast) h ₄ (mm)	Free lift h ₂ (mm)	Main lift h ₃ (mm)	Extended height with load backrest h ₄ (mm)	Extended height h ₄ (mm)	Platform height h ₁₂ (mm)
3-Stage Triform							
5625	2490	3020	1980	3570	6627	6590	3995
6375	2740	3020	1980	4320	7377	7340	4745
7125	2990	3020	1980	5070	8127	8090	5495
7875	3240	3020	1980	5820	8877	8840	6245
8625	3490	3020	1980	6570	9627	9590	6995
9375	3740	3020	1980	7320	10377	10340	7745
10125	3990	3020	1980	8070	11127	11090	8495
10875	4240	3020	1980	8820	11877	11840	9245
11625	4490	3020	1980	9570	12627	12590	9995
12375	4740	3020	1980	10320	13377	13340	10745

MAST DIMENSIONS – MTC15 MWB, MTC15 LWB

Maximum fork height H (mm)	Overall lowered height h ₁ (mm)	Overall lowered height (Mini Mast) h ₄ (mm)	Free lift h ₂ (mm)	Main lift h ₃ (mm)	Extended height with load backrest h ₄ (mm)	Extended height h ₄ (mm)	Platform height h ₁₂ (mm)
2-Stage Quadform							
5415	2990	3020	1980	3360	6417	6380	3785
5915	3240	3020	1980	3860	6917	6880	4285
6415	3490	3020	1980	4360	7417	7380	4785
6915	3740	3020	1980	4860	7917	7880	5285
7415	3990	3020	1980	5360	8417	8380	5785
7915	4240	3020	1980	5860	8917	8880	6285
8415	4490	3020	1980	6360	9417	9380	6785
8915	4740	3020	1980	6860	9917	9880	7285
9415	4990	3020	1980	7360	10417	10380	7785
9915	5240	3020	1980	7860	10917	10880	8285
10215	5390	3020	1980	8160	11217	11180	8585
10915	5740	3020	1980	8860	11917	11880	9285
11415	5990	3020	1980	9360	12417	12380	9785
11915	6240	3020	1980	9860	12917	12880	10285
12315	6440	3020	1980	10260	13317	13280	10685

MAST DIMENSIONS – 3 STAGE QUADFORM – MTC15 MWB, MTC15 LWB

Maximum fork height H (mm)	Overall lowered height h ₁ (mm)	Overall lowered height (Mini Mast) h ₆ (mm)	Free lift h ₉ (mm)	Main lift h ₃ (mm)	Extended height with load backrest h ₄ (mm)	Extended height h ₄ (mm)	Platform height h ₁₂ (mm)
3-Stage Quadform							
6945	2990	3020	1980	4890	7947	7910	7910
7695	3240	3020	1980	5640	8697	8660	8660
8445	3490	3020	1980	6390	9447	9410	9410
9195	3740	3020	1980	7140	10197	10160	10160
9945	3990	3020	1980	7890	10947	10910	10910
10695	4240	3020	1980	8640	11697	11660	11660
11445	4490	3020	1980	9390	12447	12410	12410
12195	4740	3020	1980	10140	13197	13160	13160
12945	4990	3020	1980	10890	13947	13910	13910
13695	5240	3020	1980	11640	14697	14660	14660
15945	5990	3020	1980	13890	16947	16910	16910

AUXILIARY MINI MAST OPTIONS – MTC SERIES

Free lift h ₉ (mm)	Overall lowered height (Mini Mast) h ₆ (mm)	Delta H (mm)	Extended height with h ₃ = 0 h ₆ ' (mm)	Delta h ₆ (mm)	Delta h ₉ (mm)	h ₆ ' - h ₆ (mm)	Delta h ₄ ' (mm)	Delta h ₄ (mm)	Mini Mast CL (mm)
1980	3020	0	3057	0	0	37	0	0	2950
2140	3020	160	3217	0	160	197	197	0	2950
2720	3585	740	3797	565	740	212	777	565	3515
3000	3865	1020	4077	845	1020	212	1057	845	3795

STARTING DATA – MTC SERIES

h ₁₃	75mm
Ground nose height	1077mm
Distance points nose forks	1002mm
h ₇	425mm
h ₁₃ Mini Mast CL	70mm
m ₁	100mm

All values are nominal values and they are subject to tolerances.



About Yale®

Yale Materials Handling Corporation is one of the oldest manufacturers of lift trucks in the world. We've been in the business of lifting since 1875 and we apply that experience to help customers solve materials handling challenges. Our full line of lift trucks range in capacity from 1 to 16 tonne and are powered by internal combustion engines or electric options. Yale also offers robotic solutions, telemetry, fleet management, parts, financing and training. From traditional lift truck equipment to emerging technologies, our goal, every day, is to work with our nationwide dealer network to continually improve and provide the solutions you need, when and how you need them.

MATERIALS HANDLING FOR:

3PL

Auto Parts

Beverage

Cold & Frozen Foods

Food Distribution

Food Processing

Furniture & Furnishings

Health & Pharma

Home Centres

Retail

E-Commerce

Yale Lift Truck Technologies

Centennial House
Frimley Business Park
Frimley
Surrey
GU16 7SG
United Kingdom

www.yale.com



Safety: All Yale products sold into EU countries, UK, and Turkey conform to the EU requirements of Machinery Directive 2006/42/EC and contain **CE** marking. Yale trucks sold into other countries may be ordered for production in conformance with Machinery Directive requirements, and when so ordered will contain **CE** marking.

HYSTER-YALE UK LIMITED trading as Yale Lift Truck Technologies. Registered Address: Centennial House, Building 4.5, Frimley Business Park, Frimley, Surrey, GU16 7SG, United Kingdom. Registered in England and Wales. Company Registration Number: 02636775.

©2023 Hyster-Yale Group, Inc., all rights reserved. YALE and YALE  are trademarks of Hyster-Yale Group, Inc. Trucks may be shown with optional equipment and/or features not available in all regions. Truck performance may be affected by the condition of the vehicle, how it is equipped and the application. Specifications are subject to change without notice.

Notice: Care must be exercised when handling elevated loads. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual. Consult your Yale® Dealer if any of the information shown is critical to your application.

Publication part no. 220991772 Rev.00 (0323DMS) EN