




# MSC12

SPEC SHEET

Compact Pedestrian High Lift  
Stacker

---

1,200 kg

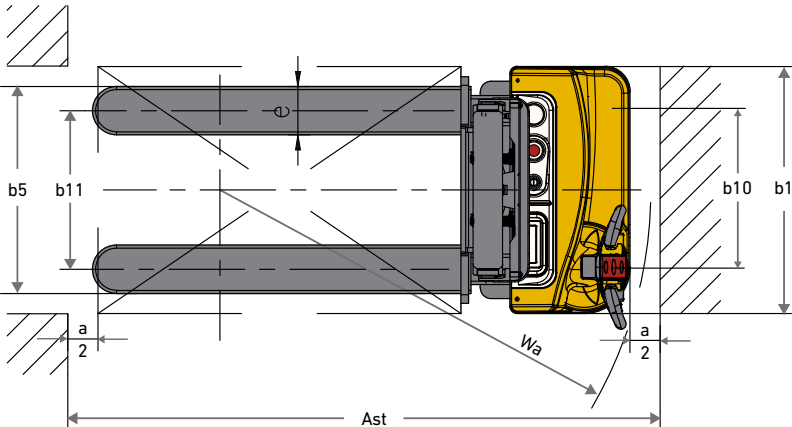

## VDI 2198 – GENERAL SPECIFICATIONS – MSC12


GENERAL	1-1	Manufacturer		Yale		
	1-2	Model designation		MSC12		
	1-3	Drive		Electric		
	1-4	Operator type		Pedestrian		
	1-5	Load capacity/rated load	Q (kg)	1200		
	1-6	Load centre distance	c (mm)	600		
	1-8	Load distance, centre of drive axle to fork	x (mm)	800		
	1-9	Wheelbase	y (mm)	1210		
WEIGHT	2-1	Service weight (without battery) (560/680)	kg	540.4 / 513.4	567.4 / 534.4	586.4 / 557.4
	2-1-1	Service weight (with 60Ah Li-battery) (560/680)	kg	554.4 / 527.4	581.1 / 548.4	600.4 / 571.4
	2-2	Axle loading, laden front/rear (2.5m) (560 fork & 60Ah Li-battery)	kg	526.4 / 1228		
	2-3	Axle loading, unladen front/rear (2.5m) (560 fork & 60Ah Li-battery)	kg	416 / 138.4		
TYRES	3-1	Wheels		Polyurethane		
	3-2	Wheel size, front	Ø × width (mm)	210 × 70		
	3-3	Wheel size, rear	Ø × width (mm)	80 × 70		
	3-4	Additional wheels (dimensions)	Ø × width (mm)	115 × 55		
	3-5	Wheels, number front/rear (x = driven wheels)		1 x + 1 / 4		
	3-6	Tread, front	b <sub>10</sub> (mm)	550		
	3-7	Tread, rear	b <sub>11</sub> (mm)	390 (560 fork width) / 525 (680 fork width)		
DIMENSIONS	4-2	Lowered mast height	h <sub>1</sub> (mm)	1730	1980	2230
	4-4	Lift height	h <sub>3</sub> (mm)	2500	3000	3500
	4-5	Extended mast height	h <sub>4</sub> (mm)	2935	3435	3935
	4-9	Height of tiller in driving position, min./max.	h <sub>14</sub> (mm)	910 / 1270		
	4-15	Height, lowered	h <sub>13</sub> (mm)	85±2		
	4-19	Overall length	l <sub>1</sub> (mm)	1730 (1150 fork length) / 1800 (1220 fork length)		
	4-20	Length to face of forks	l <sub>2</sub> (mm)	580		
	4-21-1	Overall width across chassis	b <sub>1</sub> (mm)	820		
	4-22	Fork dimensions	s/e/l (mm)	70 × 160 × 1150 (1220)		
	4-25	Width over forks	b <sub>5</sub> (mm)	560 / 680		
	4-32	Ground clearance, centre of wheelbase	m <sub>2</sub> (mm)	30		
	4-34-1	Aisle width for pallets 1000 × 1200 crossways	Ast (mm)	2268		
	4-34-2	Aisle width for pallets 800 × 1200 lengthways	Ast (mm)	2194		
PERFORMANCE	5-1	Travel speed, with/without load	km/h	4 / 4.5		
	5-2	Lift speed laden / unladen	mm/s	102 / 190		
	5-3	Lowering speed laden / unladen	mm/s	30-135 / 20-200		
	5-8	Max. gradeability, with/without load	%	5 / 10		
	5-10	Service brake		Electromagnetic		
ELECTRIC	6-1	Drive motor rating S2 60 min	kW	0.75		
	6-2	Lift motor rating at S3 15%	kW	2.5		
	6-4	Battery voltage/nominal capacity K5	V/Ah	24V / 60Ah Li-battery × 1		
	6-5	Battery weight +/- 5%	kg	14 (60Ah Li-battery)		
	6-6	Energy consumption according to EN 16796	kWh	0.42		
	8-1	Type of drive control		DC speed control		
	8-4	Sound level at the driver's ear according to EN 12053	dB (A)	<75		

## MAST DIMENSIONS – MSC12

HEIGHT, MAST LOWERED	LIFT HEIGHT	EXTENDED MAST HEIGHT
h <sub>1</sub> (mm)	h <sub>3</sub> (mm)	h <sub>4</sub> (mm)
2-STAGE NFL MAST		
1730	2500	2935
1980	3000	3435
2230	3500	3935

All values are nominal values and they are subject to tolerances.

## RATED CAPACITIES – MSC12

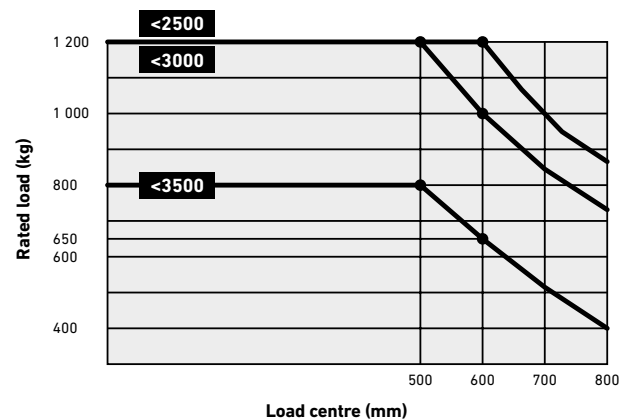

# About Yale®



Yale Lift Truck Technologies leverages over a century of material handling experience and substantial investment in innovation to bring the most advanced technology-driven lift truck solutions to market. The company offers a full line of award-winning lift trucks, including reach trucks, order pickers, turret trucks, pallet jacks and trucks, pallet stackers, tow tractors and counterbalanced forklifts, as well as powerful operator assist solutions, proven robotics and a wide range of power sources to help customers adapt to today's demanding supply chain. Yale and its independent dealer network support these solutions with comprehensive after-sales service, parts, financing and training.

Yale Lift Truck Technologies is a trading name of Hyster-Yale Asia-Pacific Pty Ltd., a wholly owned subsidiary of Hyster-Yale Materials Handling, Inc.(NYSE:HY) which is headquartered in Cleveland, Ohio and operates globally.

## MATERIALS HANDLING FOR:

3PL

Auto Parts

Beverage

Cold and Frozen Foods

Food Distribution

Food Processing

Furniture and Furnishings

Government

Health and Pharma


Home Centres

Retail & E-commerce

Yale Lift Truck Technologies | Pacific  
1/23 Rowood Road  
Prospect NSW 2148

Yale Lift Truck Technologies | Asia  
2 Venture Drive, #23-28 Vision Exchange  
Singapore 608526

**yale.com**

© 2025 Hyster-Yale Materials Handling, Inc., all rights reserved. YALE and  are trademarks of Hyster-Yale Materials Handling, Inc. Trucks may be shown with optional equipment and/or features not available in all regions. Specifications and details in this brochure are subject to change without prior notification.