




MPC15


1,500 kg

MPC15

Compact Pallet Truck

TRUCK DIMENSIONS – MPC15

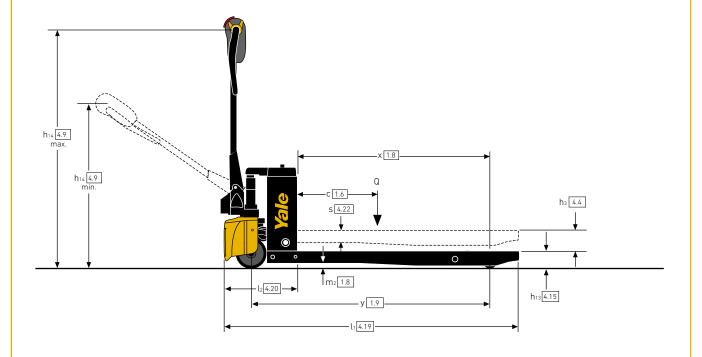

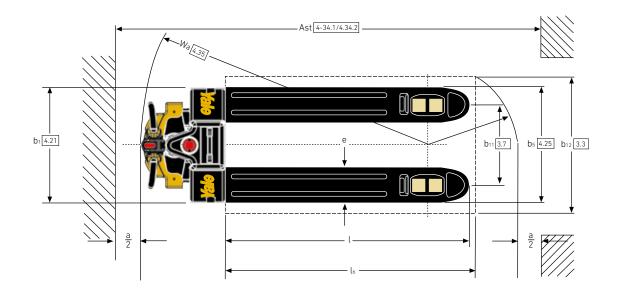

VDI	219	8 – GENERAL SPECIFICATIONS – MPC15		
GENERAL	1-1	Manufacturer		Yale
	1-2	Model designation		MPC15
	1-3	Drive		Battery
	1-4	Operator type		Pedestrian
	1-5	Rated capacity/Rated load	Q (t)	1500
	1-6	Load centre distance	c (mm)	600
	1-8	Load distance, centre of drive axle to fork	x (mm)	952 / 1022
	1-9	Wheelbase	y (mm)	1197 / 1267
WEIGHT	2-1	Service weight	kg	120
	2-2	Axle loading, laden front/rear	kg	1134 / 486
	2-3	Axle loading, unladen front/rear	kg	88 / 32
TYRES	3-1	Tyres front/rear	l Ng	Polyurethane
	3-2	Tyre size, front	ø (mm x mm)	ø 140* 55
	3-3	Tyre size, rear	ø (mm x mm)	80* 93 (single wheel) / 80* 70 (double wheel)
	3.4	Additional wheels (dimensions)	ø (mm x mm)	NA
	3-5	Wheels, number front/rear (x = driven wheels)	Ø (IIIIII X IIIIII)	1X / 2 / 2X / 4
	3-6	Tread, front	b10 (mm)	NA
	3-7	Tread, rear	b ₁₁ (mm)	385 / 520
	4-4	Lift		115
	4-4		h ₃ (mm)	740 / 1120
	4-9	Height of tiller arm in driving position min./max.	h ₁₄ (mm) h ₁₃ (mm)	82 ± 2
		Height, lowered		
	4-19	Overall length	lı (mm)	1202 / 1402 / 1552 / 1622
Š	4-20	Length to face of forks	l ₂ (mm)	402
DIMENSIONS	4-21	Overall width	b ₁ /b ₃ (mm)	550 / 685
	4-22	Fork dimensions	s/e/l (mm)	58 / 160 / 1150 (800 / 1000 / 1220)
	4-25	Outside fork width	bs (mm)	550 / 685
	4-32	Ground clearance, centre of wheelbase	m ₂ (mm)	22
	4-33	Load dimension b12 × l6 crossways	b12 x l6 (mm)	1000 x 1200
	4-34-1	Aisle width for pallets 1000mm x 1200mm crossways	Ast (mm)	1718
	4-34-2	-	Ast (mm)	1687
	4-35	Turning radius	Wa (mm)	1353 / 1426
E.	5-1	Travel speed, laden/unladen	km/h	4.0 / 4.5
	5-1-1	Travel speed, laden/unladen, backwards	km/h	4.0 / 5.0
ĀĀ	5-2	Lift speed, laden/unladen	m/s	0.018 / 0.023
PERFORMANCE	5-3	Lowering speed, laden/unladen	m/s	0.056 / 0.046
	5-7	Gradeability, laden/unladen	%	6% / 20%
	5-8	Max. gradeability, laden/unladen	%	6% / 20%
	5-10	Service brake		Electric
ELECTRIC	6-1	Drive motor S2 60 minute rating	kW	0.75 KW
	6-2	Lift motor, S3 15% rating	kW	0.5 KW
	6-3	Battery according to DIN 43531/35/36 A,B,C, no		No
	6-4	Battery voltage/nominal capacity K5	(V)/(Ah)	48V10Ah / 48V15Ah
	6-5	Battery weight	kg	4.5 / 5.9
	6-6	Energy consumption according to VDI cycle	kWh/h @ no. of cycles	0.42
	8-1	Type of drive unit		Electric
	10-7	Sound pressure level at the driver's seat according to EN 12053	dB (A)	69

All values are nominal values and they are subject to tolerances.





About Yale®

Yale Materials Handling Corporation is one of the oldest manufacturers of lift trucks in the world. We've been in the business of lifting since 1875 and we apply that experience to help customers solve materials handling challenges. Our full line of lift trucks range in capacity from 1 to 16 tonne and are powered by internal combustion engines or electric options. Yale also offers robotic solutions, telemetry, fleet management, parts, financing and training. From traditional lift truck equipment to emerging technologies, our goal, every day, is to work with our nationwide dealer network to continually improve and provide the solutions you need, when and how you need them.

MATERIALS HANDLING FOR:

3PL

Auto Parts

Beverage

Cold & Frozen Foods

Food Distribution

Food Processing

Furniture & Furnishings

Health & Pharma

Home Centres

Retail

E-Commerce

Yale Lift Truck Technologies

Centennial House Frimley Business Park Frimley Surrey GU16 7SG United Kingdom

www.yale.com



Safety: All Yale products sold into EU countries, UK, and Turkey conform to the EU requirements of Machinery Directive 2006/42/EC and contain C c marking. Yale trucks sold into other countries may be ordered for production in conformance with Machinery Directive requirements, and when so ordered will contain C c marking.

HYSTER-YALE UK LIMITED trading as Yale Lift Truck Technologies. Registered Address: Centennial House, Building 4.5, Frimley Business Park, Frimley, Surrey, GU16 7SG, United Kingdom. Registered in England and Wales. Company Registration Number: 02636775.

©2023 Hyster-Yale Group, Inc., all rights reserved. YALE and YALE \(\foatigag \) are trademarks of Hyster-Yale Group, Inc. Trucks may be shown with optional equipment and/or features not available in all regions. Truck performance may be affected by the condition of the vehicle, how it is equipped and the application. Specifications are subject to change without notice.

Notice: Care must be exercised when handling elevated loads. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual. Consult your Yale® Dealer if any of the information shown is critical to your application.

Publication part no. 220991668 Rev.01 (0723DMS) EN