



UX Series

MSL15WUX / 1500kg

Electric Walkie Stacker

MSL15WUX features.

The Yale® MSL15WUX electric walkie stacker is designed to help operators achieve greater efficiency. It combines operator friendly controls with technology that helps maximize time and effort.

Productivity


- Maintenance free AC motors
- Multi-function display with BDI and hour meter
- Handle equipped with emergency reversing button
- Auto deceleration function
- Low speed switch
- Variable speed control
- Sideways battery removal with rollers
- Mast cushioning for low-noise operation
- Built-in pressure relief valve helps protect the truck from overloading
- Emergency power disconnect switch
- 240Ah traction battery
- Cold storage configuration (option)

Optimum structural design

- Low center of gravity enhances stability
- Full free lift mast options for low overhead clearance
- Durable plastic covers
- Adjustable balance caster wheel helps improve stability

Load charts

Load center chart

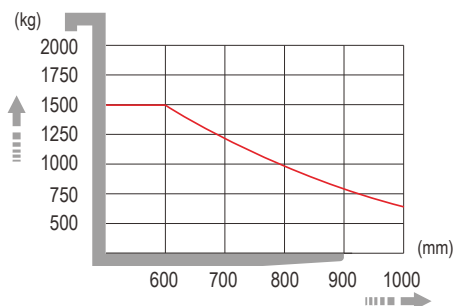

Serviceability

- Low voltage protection setting helps extend the battery life
- CANbus technology
- Simple electronic components makes troubleshooting and servicing more efficient
- Hall effect sensors reduce wear and help increase component life




Handle (standard) left and right handed




Straddle legs are adjustable

Load capacity chart

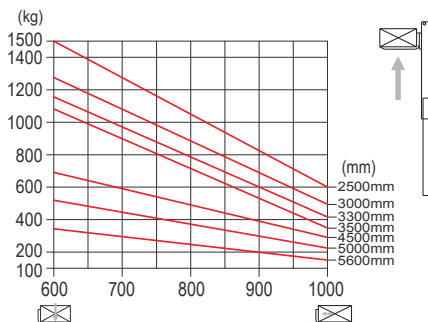

Truck Dimensions

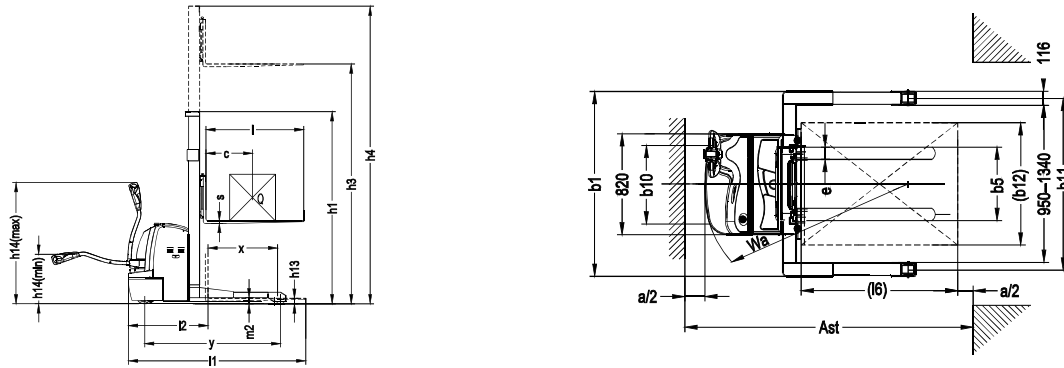

General Specifications MSL15WUX

Model	Measurement	MSL15WUX							
Load capacity	Q (kg)	1500							
Load center distance	c (mm)	600							
Load distance, center of drive axle to fork	x (mm)	697							
Fork height, lowered	h13 (mm)	70							
Wheelbase	y (mm)	1420							
Axle loading, laden front/rear	kg	1440/1280							
Axle loading, unladen front/rear	kg	870/350							
Tires		polyurethane							
Tire size, front	mm	250x70							
Tire size, rear	mm	80x84							
Additional wheels (dimensions)	mm	150x60							
Wheels, number front rear (x=driven wheels)		1x+1/4							
Tread, front	b10 (mm)	520							
Tread, rear	b11 (mm)	1040-1430							
Mast height, lowered	h1 (mm)	1805	2055	2055	2305	2120	2280	2480	
Free lift	h2 (mm)	1300	1550	1700	1800	1570	1740	1940	
Max. lift height	h3 (mm)	2500	3000	3300	3500	4500	5000	5600	
Mast height, extended	h4 (mm)	3025	3525	3825	4025	5080	5560	6160	
Height of tiller in drive position min./max.	h14 (mm)	670/1300							
Overall length	l1 (mm)	1980							
Length to face of forks	l2 (mm)	915							
Overall width	b1 (mm)	1170-1560							
Fork dimensions	s/e/l (mm)	40/100/1070 (1150)							
Width overall forks	b5 (mm)	200-800							
Ground clearance, center of wheelbase	m2 (mm)	35							
Aisle width for pallets 1000x1200 crossways	Ast (mm)	2480							
Aisle width for pallets 800x1200 lengthways	Ast (mm)	2465							
Turning radius	Wa (mm)	1610							
Travel speed, laden/unladen	km/h	5.8/6							
Lift speed, laden/unladen	m/s	0.11/0.15							
Lowering speed, laden/unladen	m/s	0.12/0.12							
Max. gradeability, laden/unladen	%	8/15							
Service brake		Electromagnetic							
Battery voltage, nominal capacity K5	V/Ah	24/240							
Battery weight	kg	240							
Battery dimensions l/w/h	mm	675x254x500							
Sound lever at the driver's ear acc.to DIN12503	dB (A)	65							
Service weight (without battery)	kg	1180/1205/1220/1230/1280/1300/1320							

MSL15WUX Power plug type



A

Power Plug



F

Power Plug



G

Power Plug



I

Power Plug

For more information, or to find your nearest Yale® dealer, go to Yale.com.



YALE MATERIALS HANDLING CORPORATION

P.O. Box 7367, Greenville, NC 27835-7367

www.yale.com

YALE,  and PEOPLE. PRODUCTS. PRODUCTIVITY. are trademarks, service marks or registered marks in the United States and certain other jurisdictions. © Yale Materials Handling Corporation 2020. All Rights Reserved.

Truck performance may be affected by the condition of the vehicle, how it is equipped and the application. Consult your Yale® Industrial Truck Dealer if any of the information shown is critical to your application. Specifications are subject to change without notice.