





MSW 12-15UX(L)

HOJA DE ESPECIFICACIONES

Pedestrian straddle
leg stacker

1200-1500 kg

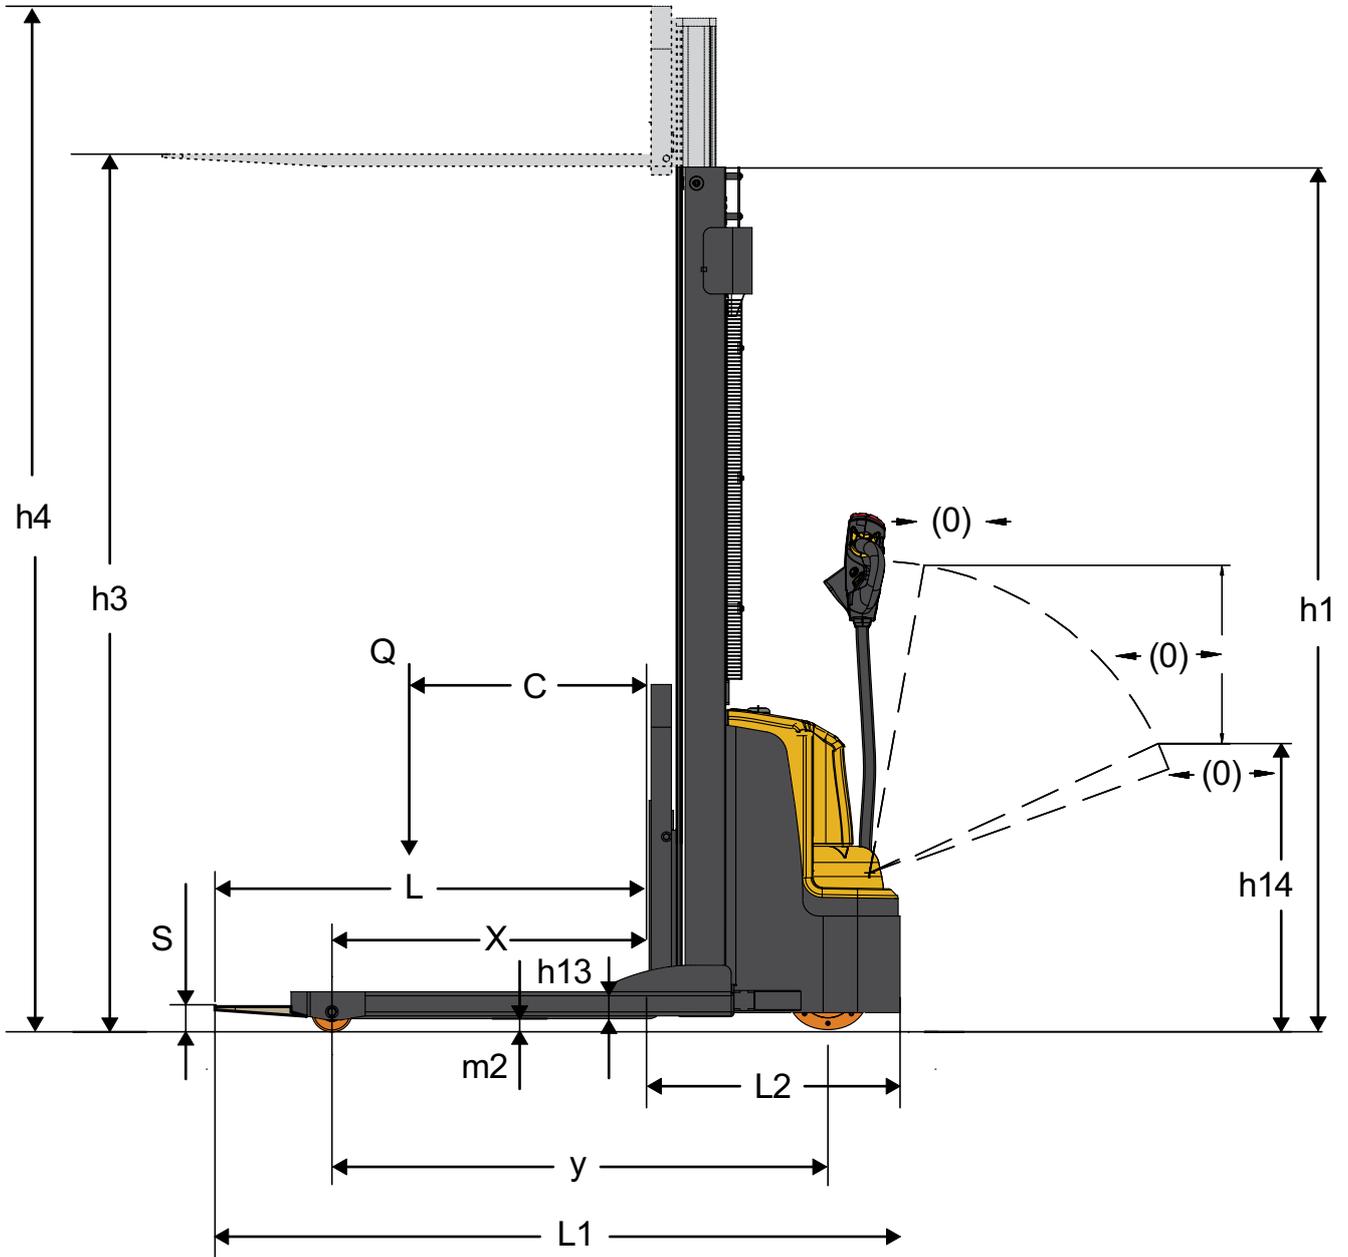

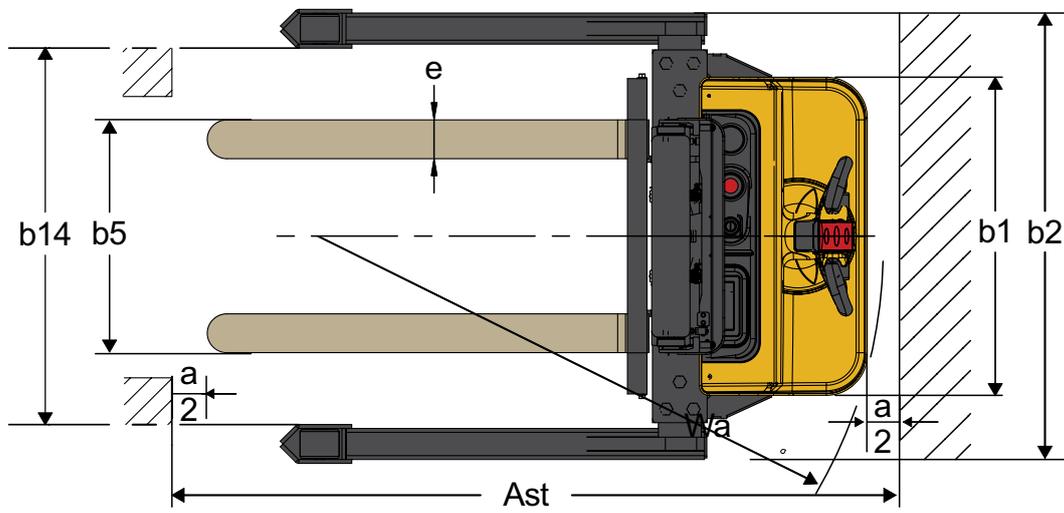

ESPECIFICACIONES GENERALES - MSW12UX(L)

| | | | | | | | | | |
|-------------|------|---|---|-----------------------------------|--|---------------|---------------|---------------|--------------|
| GENERAL | 1-1 | Manufacturer | Yale | | | | | | |
| | 1-2 | Model designation | MSW12UX(L) | | | | | | |
| | 1-3 | Drive: electric (battery or mains), diesel, gasoline, LPG | Electric (battery) | | | | | | |
| | 1-4 | Operator type: hand, pedestrian, standing, seated, order-picker | Pedestrian | | | | | | |
| | 1-5 | Load capacity/rated load | Q | lb (kg) | 2600 (1200) | | | | |
| | 1-6 | Load centre distance | c | in (mm) | 23.62 (600) | | | | |
| | 1-7 | Load distance, centre of drive axle to fork | x | in (mm) | 29.61 (752) | | | | |
| | 1-8 | Wheelbase | y | in (mm) | 49 (1245) | | | | |
| WEIGHT | 2-1 | Service weight (without battery) | lb (kg) | 1276 (580) | 1327 (603) | 1393 (633) | 1463 (665) | 1542 (701) | |
| | 2-2 | Service weight (with 60Ah Li-battery) | lb (kg) | 1313 (597) | 1364 (620) | 1430 (650) | 1500 (682) | 1580 (718) | |
| | 2-3 | Service weight (with 100Ah Li-battery) | lb (kg) | 1329 (604) | 1379 (627) | 1445 (657) | 1516 (689) | 1595 (725) | |
| | 2-4 | Service weight (with battery 71Ah) | lb (kg) | 1378 (626.4) | 1429 (649.4) | 1495 (679.4) | 1565 (711.4) | 1644 (747.4) | |
| | 2-5 | Service weight (with battery 89Ah) | lb (kg) | 1390 (631.6) | 1440 (654.6) | 1506 (684.6) | 1577 (716.6) | 1656 (752.6) | |
| | 2-6 | Axle loading, laden front / rear (2.5m lifting height) | lb (kg) | 1201 / 2803 (546 / 1274) | | | | | |
| | 2-7 | Axle loading, unladen front / rear (2.5m lifting height) | lb (kg) | 1023 / 341 (465 / 155) | | | | | |
| TYRES | 3-1 | Wheels | Polyurethane | | | | | | |
| | 3-2 | Wheel size, front | Ø x width | in (mm) | 8.27x2.76 (210x70) | | | | |
| | 3-3 | Wheel size, rear | Ø x width | in (mm) | 3.94x2.52 (100x64) | | | | |
| | 3-4 | Wheels, number front/rear (x = driven wheels) | 1x +0 / 2 or 1x +2 / 2 (with balance wheel) | | | | | | |
| | 3-5 | Tread, front (equipped with balance wheel) | b10 | in (mm) | 26.2 (665.5) | | | | |
| | 3-6 | Tread, rear | b11 | in (mm) | 41.73 (1060) / 47.24 (1200) / 52.76 (1340) | | | | |
| DIMENSIONS | 4-1 | Lowered mast height | h1 | in (mm) | 58.27 (1480) | 68.11 (1730) | 77.95 (1980) | 83.86 (2130) | 87.8 (2230) |
| | 4-2 | Lift height | h3 | in (mm) | 78.74 (2000) | 98.43 (2500) | 118.11 (3000) | 129.92 (3300) | 137.8 (3500) |
| | 4-3 | Extended mast height | h4 | in (mm) | 110.24 (2800) | 129.92 (3300) | 149.61 (3800) | 161.42 (4100) | 169.3 (4300) |
| | 4-4 | Height of tiller in driving position, min./max. | h14 | in (mm) | 35.83 / 50 (910 / 1270) | | | | |
| | 4-5 | Height, lowered | h13 | in (mm) | 3.15 (80) | | | | |
| | 4-6 | Overall length (1070mm fork length) | l1 | in (mm) | 67 (1705) (Standard 42" (1070) fork length) | | | | |
| | 4-7 | Length to face of forks | l2 | in (mm) | 25 (635) | | | | |
| | 4-8 | Overall width across chassis | b1 | in (mm) | 32.28 (820) | | | | |
| | 4-9 | Overall width across all/outer width straddle | b2 | in (mm) | 44.7 / 50.2 / 55.7 (1135/1275/1415) | | | | |
| | 4-10 | Inner width straddle | b14 | in (mm) | 38.2 / 43.7 / 49.2 (970/1110/1250) | | | | |
| | 4-11 | Fork dimensions (40 x 100 x 1070mm) | s/e/l | in (mm) | 1.58 x 3.94 x 42 (45.3 / 48) (40 X 100 X 1070 (1150/1220)) | | | | |
| | 4-12 | Width over forks (adjustable) | b5 | in (mm) | 7.87-31.3 (200-795) (Adjustable) | | | | |
| | 4-13 | Ground clearance, centre of wheelbase | m2 | in (mm) | 1.58 (40) | | | | |
| | 4-14 | Aisle width for pallets 1000 x 1200 crossways | Ast | in (mm) | 90.16 (2290) | | | | |
| | 4-15 | Aisle width for pallets 800 x 1200 lengthways | Ast | in (mm) | 87.28 (2217) | | | | |
| | 4-16 | Turning radius | Wa | in (mm) | 56.6 (1455) | | | | |
| PERFORMANCE | 5-1 | Travel speed, with/without load | mph (km/h) | 2.49 / 2.8 (4 / 4.5) | | | | | |
| | 5-2 | Lift speed, without load | in/s (mm/s) | 0-9.06 (0-230) | | | | | |
| | 5-3 | Lift speed, with load | in/s (mm/s) | 0-4.84 (0-123) | | | | | |
| | 5-4 | Lowering speed, without load | in/s (mm/s) | 1.02-10.94 (26-278) | | | | | |
| | 5-5 | Lowering speed, with load | in/s (mm/s) | 1.1-6.46 (28-164) | | | | | |
| | 5-6 | Max. gradeability, with/without load | % | 5/10 | | | | | |
| | 5-7 | Service brake | Electromagnetic | | | | | | |
| ELECTRIC | 6-1 | Drive motor rating S2 60 min | kW | 0.75 | | | | | |
| | 6-2 | Lift motor rating at S3 15% | kW | 2.5 | | | | | |
| | 6-3 | Battery voltage/nominal capacity K5 (Li-battery) | V/Ah | 24V / 60Ah x 1 / 24V / 100Ah x 1 | | | | | |
| | 6-4 | Battery voltage/nominal capacity K5 (Lead-acid battery) | V/Ah | 12V / 71Ah x 2 / 12V / 89Ah x 2 | | | | | |
| | 6-5 | Battery weight +/- 5% (Li-battery) | lb (kg) | 14kg (60Ah) / 24kg (100Ah) | | | | | |
| | 6-6 | Battery weight +/- 5% (Lead-acid battery) | lb (kg) | 23.3 x 2 (71Ah) / 25.8 x 2 (89Ah) | | | | | |
| | 6-7 | Energy consumption according to EN 16796 | kWh | 0.42 | | | | | |
| ADDITION | 7-1 | Type of drive control | DC speed control | | | | | | |
| | 7-2 | Sound level at the driver's ear according to EN 12053 | dB(A) | <75 | | | | | |

Truck performance and dimensions are nominal and subject to tolerances.
 Yale products and specifications are subject to change without notice.

ESPECIFICACIONES GENERALES - MSW15UX(L)

| | | | | | | | | | |
|-------------|------|---|-----------|---|--|---------------|---------------|---------------|--------------|
| GENERAL | 1-1 | Manufacturer | | Yale | | | | | |
| | 1-2 | Model designation | | MSW15UX(L) | | | | | |
| | 1-3 | Drive: electric (battery or mains), diesel, gasoline, LPG | | Electric (battery) | | | | | |
| | 1-4 | Operator type: hand, pedestrian, standing, seated, order-picker | | Pedestrian | | | | | |
| | 1-5 | Load capacity/rated load | Q | lb (kg) | 3300 (1500) | | | | |
| | 1-6 | Load centre distance | c | in (mm) | 23.62 (600) | | | | |
| | 1-7 | Load distance, centre of drive axle to fork | x | in (mm) | 29.61 (752) | | | | |
| | 1-8 | Wheelbase | y | in (mm) | 49 (1245) | | | | |
| WEIGHT | 2-1 | Service weight (without battery) | | lb (kg) | 1280 (581.6) | 1330 (604.6) | 1396 (634.6) | 1467 (666.6) | 1546 (702.6) |
| | 2-2 | Service weight (with 60Ah Li-battery) | | lb (kg) | 1317 (598.6) | 1368 (621.6) | 1434 (651.6) | 1504 (683.6) | 1583 (719.6) |
| | 2-3 | Service weight (with 100Ah Li-battery) | | lb (kg) | 1332 (605.6) | 1383 (628.6) | 1449 (658.6) | 1519 (690.6) | 1599 (726.6) |
| | 2-4 | Service weight (with battery 71Ah) | | lb (kg) | 1382 (628) | 1432 (651) | 1498 (681) | 1569 (713) | 1648 (749) |
| | 2-5 | Service weight (with battery 89Ah) | | lb (kg) | 1393 (633.2) | 1444 (656.2) | 1510 (686.2) | 1580 (718.2) | 1659 (754.2) |
| | 2-6 | Axle loading, laden front / rear (2.5m lifting height) | | lb (kg) | 1401/3267 (636.6 / 1485) | | | | |
| | 2-7 | Axle loading, unladen front / rear (2.5m lifting height) | | lb (kg) | 1025/342 (466 / 155.6) | | | | |
| TYRES | 3-1 | Wheels | | Polyurethane | | | | | |
| | 3-2 | Wheel size, front | Ø x width | in (mm) | 8.27x2.76 (210x70) | | | | |
| | 3-3 | Wheel size, rear | Ø x width | in (mm) | 3.94x2.52 (100x64) | | | | |
| | 3-4 | Wheels, number front/rear (x = driven wheels) | | 1x +0 / 2 or 1x +2 / 2 (with balance wheel) | | | | | |
| | 3-5 | Tread, front (equipped with balance wheel) | b10 | in (mm) | 26.2 (665.5) | | | | |
| | 3-6 | Tread, rear | b11 | in (mm) | 41.73 (1060) / 47.24 (1200) / 52.76 (1340) | | | | |
| DIMENSIONS | 4-1 | Lowered mast height | h1 | in (mm) | 58.27 (1480) | 68.11 (1730) | 77.95 (1980) | 83.86 (2130) | 87.8 (2230) |
| | 4-2 | Lift height | h3 | in (mm) | 78.74 (2000) | 98.43 (2500) | 118.11 (3000) | 129.92 (3300) | 137.8 (3500) |
| | 4-3 | Extended mast height | h4 | in (mm) | 110.24 (2800) | 129.92 (3300) | 149.61 (3800) | 161.42 (4100) | 169.3 (4300) |
| | 4-4 | Height of tiller in driving position, min./max. | h14 | in (mm) | 35.83 / 50 (910 / 1270) | | | | |
| | 4-5 | Height, lowered | h13 | in (mm) | 3.15 (80) | | | | |
| | 4-6 | Overall length (1070mm fork length) | l1 | in (mm) | 67 (1705) (Standard 42" (1070) fork length) | | | | |
| | 4-7 | Length to face of forks | l2 | in (mm) | 25 (635) | | | | |
| | 4-8 | Overall width across chassis | b1 | in (mm) | 32.28 (820) | | | | |
| | 4-9 | Overall width across all/outer width straddle | b2 | in (mm) | 44.7 / 50.2 / 55.7 (1135/1275/1415) | | | | |
| | 4-10 | Inner width straddle | b14 | in (mm) | 38.2 / 43.7 / 49.2 (970/1110/1250) | | | | |
| | 4-11 | Fork dimensions (40 x 100 x 1070mm) | s/e/l | in (mm) | 1.58 x 3.94 x 42 (45.3 / 48) (40 X 100 X 1070 (1150/1220)) | | | | |
| | 4-12 | Width over forks (adjustable) | b5 | in (mm) | 7.87-31.3 (200-795) (Adjustable) | | | | |
| | 4-13 | Ground clearance, centre of wheelbase | m2 | in (mm) | 1.58 (40) | | | | |
| | 4-14 | Aisle width for pallets 1000 x 1200 crossways | Ast | in (mm) | 90.16 (2290) | | | | |
| | 4-15 | Aisle width for pallets 800 x 1200 lengthways | Ast | in (mm) | 87.28 (2217) | | | | |
| | 4-16 | Turning radius | Wa | in (mm) | 56.6 (1455) | | | | |
| PERFORMANCE | 5-1 | Travel speed, with/without load | | mph (km/h) | 2.49 / 2.8 (4 / 4.5) | | | | |
| | 5-2 | Lift speed, without load | | in/s (mm/s) | 0-7.28 (0-185) | | | | |
| | 5-3 | Lift speed, with load | | in/s (mm/s) | 0.4 (0-101) | | | | |
| | 5-4 | Lowering speed, without load | | in/s (mm/s) | 0.85-8.2 (21.7-208) | | | | |
| | 5-5 | Lowering speed, with load | | in/s (mm/s) | 1-5.4 (25.6-137) | | | | |
| | 5-6 | Max. gradeability, with/without load | | % | 5/10 | | | | |
| | 5-7 | Service brake | | Electromagnetic | | | | | |
| ELECTRIC | 6-1 | Drive motor rating S2 60 min | | kW | 0.75 | | | | |
| | 6-2 | Lift motor rating at S3 15% | | kW | 2.5 | | | | |
| | 6-3 | Battery voltage/nominal capacity K5 (Li-battery) | | V/Ah | "24V / 60Ah x 1 / 24V / 100Ah x 1" | | | | |
| | 6-4 | Battery voltage/nominal capacity K5 (Lead-acid battery) | | V/Ah | 12V / 71Ah x 2 / 12V / 89Ah x 2 | | | | |
| | 6-5 | Battery weight +/- 5% (Li-battery) | | lb (kg) | 14kg (60Ah) / 24kg (100Ah) | | | | |
| | 6-6 | Battery weight +/- 5% (Lead-acid battery) | | lb (kg) | 23.3 x 2 (71Ah) / 25.8 x 2 (89Ah) | | | | |
| | 6-7 | Energy consumption according to EN 16796 | | kWh | 0.42 | | | | |
| ADDITION | 7-1 | Type of drive control | | DC speed control | | | | | |
| | 7-2 | Sound level at the driver's ear according to EN 12053 | | dB(A) | <75 | | | | |

Truck performance and dimensions are nominal and subject to tolerances.
Yale products and specifications are subject to change without notice.

ESPECIFICACIONES GENERALES - MSW15UX(L) (75 X 75 MM)

| | | | | | | | | | |
|-------------|------|---|---|-----------------------------------|--|---------------|---------------|---------------|--------------|
| GENERAL | 1-1 | Manufacturer | Yale | | | | | | |
| | 1-2 | Model designation | MSW15UX(L) (75 x 75 mm) | | | | | | |
| | 1-3 | Drive: electric (battery or mains), diesel, gasoline, LPG | Electric (battery) | | | | | | |
| | 1-4 | Operator type: hand, pedestrian, standing, seated, order-picker | Pedestrian | | | | | | |
| | 1-5 | Load capacity/rated load | Q | lb (kg) | 3300 (1500) | | | | |
| | 1-6 | Load centre distance | c | in (mm) | 23.62 (600) | | | | |
| | 1-7 | Load distance, centre of drive axle to fork | x | in (mm) | 29.61 (752) | | | | |
| | 1-8 | Wheelbase | y | in (mm) | 49 (1245) | | | | |
| WEIGHT | 2-1 | Service weight (without battery) | lb (kg) | 1280 (581.6) | 1330 (604.6) | 1396 (634.6) | 1467 (666.6) | 1546 (702.6) | |
| | 2-2 | Service weight (with 60Ah Li-battery) | lb (kg) | 1317 (598.6) | 1368 (621.6) | 1434 (651.6) | 1504 (683.6) | 1583 (719.6) | |
| | 2-3 | Service weight (with 100Ah Li-battery) | lb (kg) | 1332 (605.6) | 1383 (628.6) | 1449 (658.6) | 1519 (690.6) | 1599 (726.6) | |
| | 2-4 | Service weight (with battery 71Ah) | lb (kg) | 1382 (628) | 1432 (651) | 1498 (681) | 1569 (713) | 1648 (749) | |
| | 2-5 | Service weight (with battery 89Ah) | lb (kg) | 1393 (633.2) | 1444 (656.2) | 1510 (686.2) | 1580 (718.2) | 1659 (754.2) | |
| | 2-6 | Axle loading, laden front / rear (2.5m lifting height) | lb (kg) | 1401/3267 (636.6 / 1485) | | | | | |
| | 2-7 | Axle loading, unladen front / rear (2.5m lifting height) | lb (kg) | 1025/342 (466 / 155.6) | | | | | |
| TYRES | 3-1 | Wheels | Polyurethane | | | | | | |
| | 3-2 | Wheel size, front | Ø x width | in (mm) | 8.27x2.76 (210x70) | | | | |
| | 3-3 | Wheel size, rear | Ø x width | in (mm) | 4.53x1.93 (115x49) | | | | |
| | 3-4 | Wheels, number front/rear (x = driven wheels) | 1x +0 / 2 or 1x +2 / 4 (with balance wheel) | | | | | | |
| | 3-5 | Tread, front (equipped with balance wheel) | b10 | in (mm) | 26.2 (665.5) | | | | |
| | 3-6 | Tread, rear | b11 | in (mm) | 41.73 (1060) / 47.24 (1200) / 52.76 (1340) | | | | |
| DIMENSIONS | 4-1 | Lowered mast height | h1 | in (mm) | 58.27 (1480) | 68.11 (1730) | 77.95 (1980) | 83.86 (2130) | 87.8 (2230) |
| | 4-2 | Lift height | h3 | in (mm) | 78.74 (2000) | 98.43 (2500) | 118.11 (3000) | 129.92 (3300) | 137.8 (3500) |
| | 4-3 | Extended mast height | h4 | in (mm) | 110.24 (2800) | 129.92 (3300) | 149.61 (3800) | 161.42 (4100) | 169.3 (4300) |
| | 4-4 | Height of tiller in driving position, min./max. | h14 | in (mm) | 35.83 / 50 (910 / 1270) | | | | |
| | 4-5 | Height, lowered | h13 | in (mm) | 3.15 (80) | | | | |
| | 4-6 | Overall length (1070mm fork length) | l1 | in (mm) | 67 (1705) (Standard 42" (1070) fork length) | | | | |
| | 4-7 | Length to face of forks | l2 | in (mm) | 25 (635) | | | | |
| | 4-8 | Overall width across chassis | b1 | in (mm) | 32.28 (820) | | | | |
| | 4-9 | Overall width across all/outer width straddle | b2 | in (mm) | 44.7 / 50.2 / 55.7 (1135/1275/1415) | | | | |
| | 4-10 | Inner width straddle | b14 | in (mm) | 38.8 / 44.3 / 49.8 (985/1125/1265) | | | | |
| | 4-11 | Fork dimensions (40 x 100 x 1070mm) | s/e/l | in (mm) | 1.58 x 3.94 x 42 (45.3 / 48) (40 X 100 X 1070 (1150/1220)) | | | | |
| | 4-12 | Width over forks (adjustable) | b5 | in (mm) | 7.87-31.3 (200-795) (Adjustable) | | | | |
| | 4-13 | Ground clearance, centre of wheelbase | m2 | in (mm) | 1.58 (40) | | | | |
| | 4-14 | Aisle width for pallets 1000 x 1200 crossways | Ast | in (mm) | 90.16 (2290) | | | | |
| | 4-15 | Aisle width for pallets 800 x 1200 lengthways | Ast | in (mm) | 87.28 (2217) | | | | |
| | 4-16 | Turning radius | Wa | in (mm) | 56.6 (1455) | | | | |
| PERFORMANCE | 5-1 | Travel speed, with/without load | mph (km/h) | 2.49 / 2.8 (4 / 4.5) | | | | | |
| | 5-2 | Lift speed, without load | in/s (mm/s) | 0-7.28 (0-185) | | | | | |
| | 5-3 | Lift speed, with load | in/s (mm/s) | 0.4 (0-101) | | | | | |
| | 5-4 | Lowering speed, without load | in/s (mm/s) | 0.85-8.2 (21.7-208) | | | | | |
| | 5-5 | Lowering speed, with load | in/s (mm/s) | 1-5.4 (25.6-137) | | | | | |
| | 5-6 | Max. gradeability, with/without load | % | 5/10 | | | | | |
| | 5-7 | Service brake | Electromagnetic | | | | | | |
| ELECTRIC | 6-1 | Drive motor rating S2 60 min | kW | 0.75 | | | | | |
| | 6-2 | Lift motor rating at S3 15% | kW | 2.5 | | | | | |
| | 6-3 | Battery voltage/nominal capacity K5 (Li-battery) | V/Ah | 24V / 60Ah x 1 / 24V / 100Ah x 1 | | | | | |
| | 6-4 | Battery voltage/nominal capacity K5 (Lead-acid battery) | V/Ah | 12V / 71Ah x 2 / 12V / 89Ah x 2 | | | | | |
| | 6-5 | Battery weight +/- 5% (Li-battery) | lb (kg) | 14kg (60Ah) / 24kg (100Ah) | | | | | |
| | 6-6 | Battery weight +/- 5% (Lead-acid battery) | lb (kg) | 23.3 x 2 (71Ah) / 25.8 x 2 (89Ah) | | | | | |
| | 6-7 | Energy consumption according to EN 16796 | kWh | 0.42 | | | | | |
| ADDITION | 7-1 | Type of drive control | DC speed control | | | | | | |
| | 7-2 | Sound level at the driver's ear according to EN 12053 | dB(A) | <75 | | | | | |

Truck performance and dimensions are nominal and subject to tolerances.
Yale products and specifications are subject to change without notice.

LISTA DE CARACTERÍSTICAS

| PERFORMANCE | STD | OPT | ENERGY SYSTEM | STD | OPT |
|---|------------|------------|---|------------|------------|
| 24V system with brush motor | ● | | 24V/60Ah lithium-ion battery (UL) | ● | |
| Mechanical steering | ● | | On-board charger 24V/30A 100-240V UL (for lithium-ion battery) | ● | |
| Proportional speed on lifting/lowering | ● | | On-board charger plug (American Std) type B | ● | |
| Standard environmental construction (0-45°C;) | ● | | 24V/71Ah maintenace free lead-acid battery LEOCH (CE & UL) | | ● |
| DRIVE | STD | OPT | 24V/89Ah maintenace free lead-acid battery LEOCH (CE & UL) | | ● |
| 100 × 64mm single Polyurethane load wheel (REACH) | ● | | 24V/100Ah lithium-ion battery (UL) | | ● |
| 100 × 49mm single Polyurethane load wheel (REACH) for straddle leg size 75*75mm | | ● | 1 extra battery | | ● |
| 210 × 75mm Polyurethane (REACH) drive wheel | ● | | On-board charger 24V/10A 100-240V TL POWER (for lead-acid battery) non-CE | | ● |
| 75 x 30mm double balance wheel | | ● | On-board charger 24V/15A 100-240V UL (For lead-acid battery) | | ● |
| LIFT | STD | OPT | On-board charger plug (Japanese Std) type A | | ● |
| 2 Stage No Free Lift - 1770mm/2500mm/3020mm | ● | | SUPPLEMENTAL | STD | OPT |
| 2 Stage No Free Lift - 1520mm/2000mm/2520mm | | ● | 12 Months / No Hour Limit Full Truck Warranty, 36 Months / 6,000 Hours Powertrain Warranty, Lifetime Frame Warranty; please see full Warranty Statement for additional details. | ● | |
| 2 Stage No Free Lift - 2020mm/3000mm/3520mm | | ● | Operating manual | ● | |
| 2 Stage No Free Lift - 2170mm/3300mm/3820mm | | ● | Parts manual | | ● |
| 2 Stage No Free Lift - 2270mm/3500mm/4020mm | | ● | | | |
| HANDLING | STD | OPT | | | |
| 1070mm x 200-800mm forks | ● | | | | |
| 1150mm x 200-800mm forks | | ● | | | |
| H60xW90mm straddle leg | ● | | | | |
| H75xW75mm straddle leg | | ● | | | |
| OPERATION | STD | OPT | | | |
| Key switch | ● | | | | |
| Keypad with password protection non-CE | | ● | | | |
| Remote key: function for remote control lift/lower; 5 traveling speed setting, horn; (non-CE, non-UL) | | ● | | | |
| MDI Display - multi-function LCD screen display shows working status, hourmeter, BDI, error code | ● | | | | |
| Two side proportional control knob | ● | | | | |
| VISIBILITY | STD | OPT | | | |
| Metal wiremesh | ● | | | | |
| Lexan shield | | ● | | | |



Acerca de Yale

Yale Tecnología em Montacargas aprovecha más de un siglo de experiencia en el manejo de materiales y una inversión sustancial en innovación para llevar al mercado las soluciones de montacargas basadas en tecnología más avanzadas. La empresa ofrece una línea completa de montacargas galardonados, entre los que se incluyen montacargas, selectores de pedidos, montacargas con torreta, transpaletas y montacargas portatarimas, apiladores de tarimas, tractores de remolque y montacargas contrabalanceados, así como potentes soluciones de asistencia al operador, robótica comprobada y una amplia gama de fuentes de energía para ayudar a los clientes a adaptarse a la exigente cadena de suministro actual. Yale y su red de distribuidores independientes respaldan estas soluciones con un servicio posventa integral, piezas, financiación y capacitación.

EQUIPOS DE MANIPULACIÓN DE MATERIALES PARA:

Logística de terceros (3PL)

Distribución de piezas de automoción

Bebidas

Alimentos fríos y congelados

Distribución de alimentos

Tratamiento de alimentos

Muebles y enseres

Gobierno

Salud y farmacia

Centros para el hogar y bienes duraderos

Venta al por menor y comercio electrónico

Yale Tecnología em Montacargas
P.O. Box 7367
Greenville, NC 27835-7367
EE. UU.

yale.com

© 2026 Hyster-Yale Materials Handling, Inc., todos los derechos reservados. YALE y  son marcas comerciales de Hyster-Yale Materials Handling, Inc.

Es posible que los montacargas se exhiban con equipos opcionales o características que no están disponibles en todas las regiones. El rendimiento del montacargas puede verse afectado por la condición del vehículo, la forma en que está equipado y la aplicación. Las especificaciones están sujetas a cambios sin previo aviso. Consulte a su distribuidor Yale® si cualquier parte de la información mostrada es esencial para su aplicación.

CERTIFICACIÓN: Los montacargas Yale cumplen con los requisitos de diseño y construcción de B56.1-1969, según la Sección 1910.178 (a) (2) de OSHA, y también cumplen con la revisión B56.1 vigente al momento de la fabricación.