



UX Series

MP20KUX / 2000kg

Electric Walkie Pallet Truck

MP20KUX features.

The Yale® MP20KUX electric walkie pallet truck combines efficiency-enhancing features with reliable performance to help meet operational demands. This low maintenance truck can help increase productivity and reduce operational costs.

Productivity

- Advanced AC control system eliminates the motor brushes, which limits maintenance requirements
- Low skirting on main chassis
- Side battery roll-out system provides a convenient method for replacing batteries
- Built-in pressure relief valve helps protect the truck from overloading
- Emergency power disconnect switch
- Long handle reduces steering effort
- Emergency reversing system in handle
- Low speed switch in the handle
- Variable speed control
- Cold store configuration (option)

Optimum structural design

- Spring-loaded casters improve lateral stability on uneven floors, enhance truck performance and help extend service life
- Formed heavy gauge steel provides maximum fork strength and longevity
- Pull rod design protects against bending
- Durable plastic covers

Serviceability

- CANbus technology reduces wiring complexity
- Low battery protection setting helps extend the battery life
- All pivot points have grease fittings and serviceable bushing, reducing component wear





Handle (standard) left and right handed



Entry roller for easy operation

Truck Dimensions

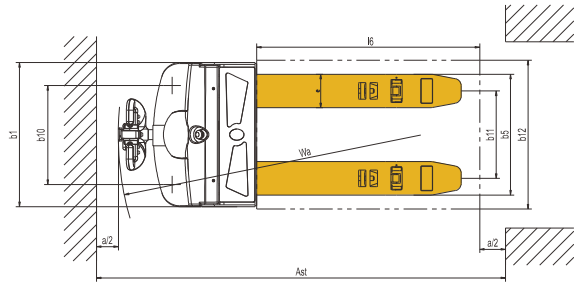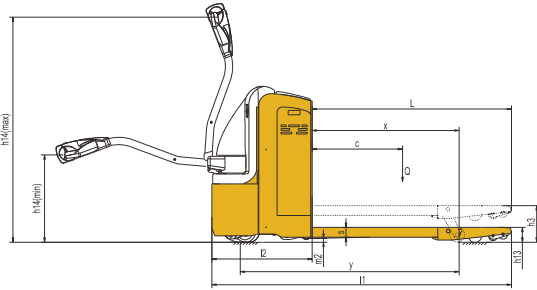

General Specifications MP20KUX

Model	Measurement	MP20KUX
Load capacity/rated load	Q (kg)	2000
Load center distance	C (mm)	600
Load distance, center of drive axle to fork	X (mm)	815/865/935
Fork height, lowered	h13 (mm)	82
Tire size, front	mm	250x70
Tire size, rear	mm	82x126 (98)
Additional wheels (dimensions)	mm	127x57
Wheels, number front rear (x=driven wheels)		1x+2/2 (4)
Max. lift height	h3 (mm)	202
Height of tiller in drive position min./max.	h14 (mm)	780/1230
Overall length	l1 (mm)	1655/1705/1775
Length to face of forks	l2 (mm)	555
Overall width	b1 (mm)	775
Fork dimensions	S/E/L (mm)	54x180x1100/1150/1220
Width overall forks	b5 (mm)	520/550/650/685
Aisle width for pallets 1000x1200 crossways	Ast (mm)	2015/2065/2135
Aisle width for pallets 800x1200 lengthways	Ast (mm)	2115/2115/2135
Turning radius	Wa (mm)	1400/1450/1520
Travel speed, laden/unladen	km/h	5.5/5.6
Battery voltage, nominal capacity K5	V/Ah	24/210
Battery weight	kg	196
Battery box dimensions	mm	750x170x534
Service weight (with battery)	kg	640-645

MP20KUX Power plug type



A
Power Plug



F
Power Plug



G
Power Plug



I
Power Plug

For more information, or to find your nearest Yale® dealer, go to Yale.com.



YALE MATERIALS HANDLING CORPORATION

P.O. Box 7367, Greenville, NC 27835-7367

www.yale.com

YALE,  and PEOPLE. PRODUCTS. PRODUCTIVITY. are trademarks, service marks or registered marks in the United States and certain other jurisdictions. © Yale Materials Handling Corporation 2020. All Rights Reserved.

Truck performance may be affected by the condition of the vehicle, how it is equipped and the application. Consult your Yale® Industrial Truck Dealer if any of the information shown is critical to your application. Specifications are subject to change without notice.