



MRW 020-030E

SPEC SHEET


Electric walkie
stacker

2,000-3,000 lbs.

GENERAL SPECIFICATIONS - MRW020E, MRW030E

GENERAL	1	Manufacturer	Manufacture name			Yale	Yale
	2	Model	Manufacturer designation			MRW020E	MRW030E
	3	Capacity	Rated capacity		lb. (kg)	2000 (910)	3000 (1360)
	4	Load center	Distance		in. (mm)	24 (610)	24 (610)
	5	Power type	Gasoline, LPG, diesel, electric			Electric	Electric
	6	Operator type	Pedestrian, stand-on, seated rider			Pedestrian	Pedestrian
	8	Tire type	Cushion, solid, pneumatic etc.			Cushion	Cushion
	9	Wheels	Number - drive / load			1/4	1/4
	DIMENSIONS	10	Lift height with simplex mast	Lift height (top of fork)		in. (mm)	123 (3124)
11		Standard free lift (top of fork)			in. (mm)	6.5 (165.1)	6.5 (165.1)
12		Maximum carriage width			in. (mm)	32.5 (825)	32.5 (825)
13		Forks	Thickness x width x length		in. (mm)	1.5 x 4.0 x 42	1.5 x 4.0 x 42
14		Fork spread	Outside dimension - max		in. (mm)	30.0 (772)	30.0 (772)
15		Tilt of mast	Backward/forward		degrees	4/3	4/3
16		Overall dimensions	Length to face of forks		in. (mm)	55.5 (1409)	55.5 (1409)
17			Outrigger ID		in. (mm)	35 (889) - 49 (1245)	35 (889) - 49 (1245)
18			Lowered overall height (LOH)		in. (mm)	83 (2108.2)	83 (2108.2)
19			Maximum fork height (MFH)		in. (mm)	123 (3124)	123 (3124)
21		Turning radius	Minimum (outside)		in. (mm)	74.2 (1885)	74.2 (1885)
22		Overhang	End of outrigger to face of forks		in. (mm)	2.6 (66)	2.6 (66)
23		Right angle stack			in. (mm)	See chart	See chart
24		Intersecting aisle			in. (mm)	See chart	See chart
	Stability	Comply with ANSI?			Yes	Yes	
PERFORMANCE	25	Speeds	Voltage			24	24
			Travel speed max - with load		mph (km/h)	3.1 (4.9)	2.9 (4.7)
			No load			3.5 (5.6)	3.5 (5.6)
			Lift speed - with load		ft/min (m/sec)	22 (.11)	22 (.11)
			No load			30 (.15)	30 (.15)
			Lowering speed - with load		ft/min (m/sec)	45 (.23)	45 (.23)
		No load			43 (.22)	43 (.22)	
WT.	29	Gradeability			%	10	10
	31	Unloaded weight	Standard truck without battery		lb. (kg)	3422 (1552)	3422 (1552)
WHEELS AND TIRES	32	Axle loads	No load - drive/load with min. battery		lb. (kg)	2286 (1037) / 1736 (787)	2286 (1037) / 1736 (787)
	33	Tire size	Number - Drive/load			1/4	1/4
			Drive tire			10" x 5" Poly	10" x 5" Poly
			Load wheels			4.0" x 2.8" Tandem poly	4.0" x 2.8" Tandem poly
	34	Wheelbase	Distance		in. (mm)	64.4 (1634.6)	64.4 (1634.6)
	37	Ground clearance	No load at lowest point		in. (mm)	0.5 (12.5)	0.5 (12.5)
No load at center of wheelbase				in. (mm)	1.5 (38)	1.5 (38)	
BATTERY	41	Battery	Voltage			24	24
	42		Type			Lead acid	Lead acid
	43		Amphere hours (max)			510	510
	43		Minimum weight		lb. (kg)	600 (273)	600 (273)
MOTORS	45	Electric motors	Traction motor - 60 min rating		hp (kw)	2.3 (1.7)	2.3 (1.7)
	46		Pump motor - 15 min rating		hp (kw)	4 (3)	4 (3)
	47		Traction motor control method			Transistor	Transistor
	47		Number of speeds			Infinitely variable	Infinitely variable
	48	Relief press			psi	2900	2900
	49	Grade clearance	% clearance 13.5" comp.		%	13	13

TRUCK DIMENSIONS - MRW020E, MRW030E - 2000 - 3000 LBS. CAPACITY REACH STACKER

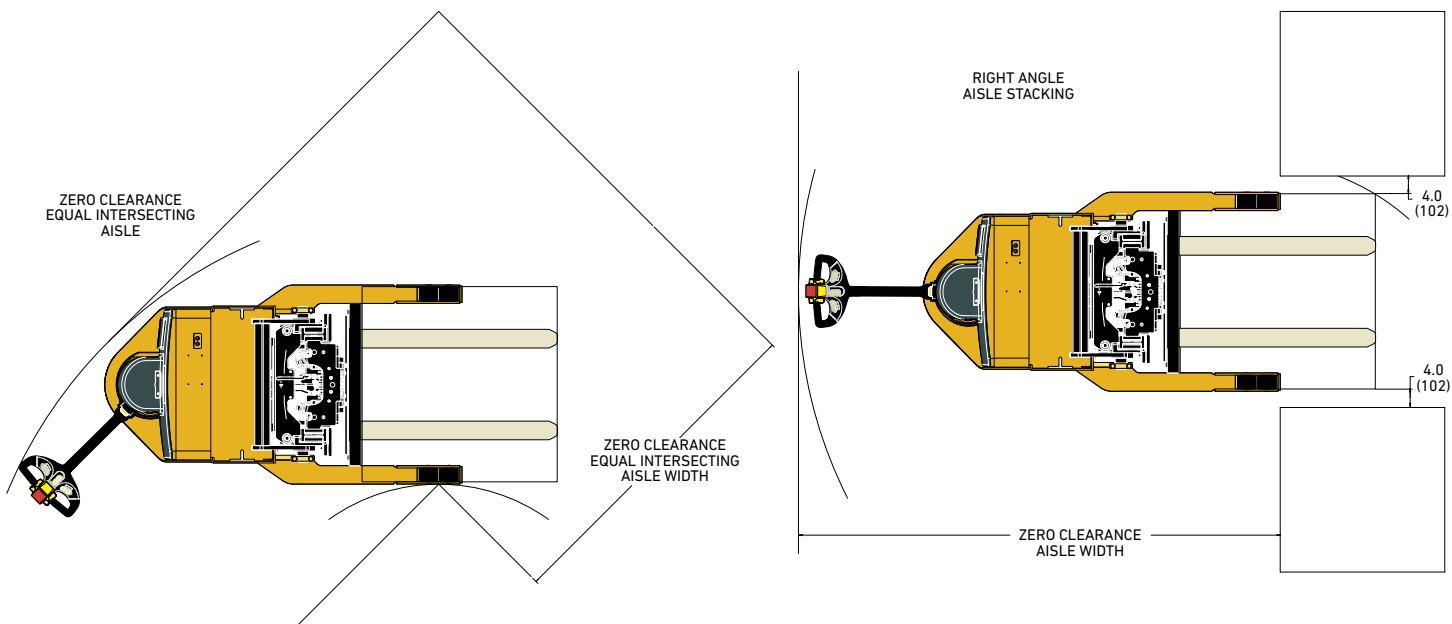

INTERSECTING EQUAL AISLE

Load up and over outriggers					Load between outriggers				
Load width	Load length				Outrigger OAW	Load length			
	36	40	42	48		36	40	42	48
36	63	63	63	63	44	69	69	69	69
40	65	65	65	65	48	71	71	71	71
41	65	65	65	65	49	71	71	71	71
42	66	66	66	66	50	71	71	71	71
48	69	69	69	69	57	74	74	74	74

Note: It is recommended to add a minimum 6" - 12" for clearance. For triplex mast add 2"

RIGHT ANGLE STACK

Load width	Load length			
	36	40	42	48
36	82	89	92	99
40	81	88	91	99
41	80	88	91	99
42	80	88	91	99
48	80	86	89	98

Note: It is recommended to add a minimum 6" - 12" for clearance and stacking. For triplex mast add 2"

STANDARD SPECIFICATIONS

Load width	Outrigger ID	O.A.W.	Load length	Fork length	Wheelbase	O.A.L. *	Length to face of forks
32	35	43	30-32	36	64.4	91.5	55.5
36	37	45	34-36	36	64.4	91.5	55.5
42	43	51	38-42	42	64.4	97.5	55.5
48	49	57	44-48	48	64.4	103.5	55.5

* For triplex mast add 2"

STANDARD LIFT SPECIFICATIONS

Lowered overall height	Lift height	Free lift	Extended height
MRW020-030E simplex masts			
72 (1829)	101 (2565)	6.5 (165)	149 (3785)
77 (1956)	111 (2819)		159 (4039)
83 (2108)	123 (3124)		171 (4343)
92 (2337)	141 (3581)		189 (4801)
MRW020-030E triplex masts			
73 (1829)	149 (3810)	50 (1270)	197 (5004)
78 (1956)	164 (4166)	55 (1397)	212 (5385)
83 (2108)	179 (4547)	60 (1524)	227 (5766)

BATTERY AND COMPARTMENT SPECIFICATIONS

No. of cells	Cell size	Plates per cell	Capacity amp-hours	KWH	"X" dim.	"Y" dim.	"Z" dim.	Weight
12	75	11	375	8.7	26.5	13.0	23.3	825 lbs.
12	85	11	425	9.9	26.1	12.8	23.3	865 lbs
12	75	13	450	10.5	30.9	13.0	23.3	987 lbs
12	85	13	510	11.9	30.9	13.0	23.3	1035 lbs

- Notes: 1) Steel tray with cover required for all batteries.
- 2) Battery connector type 175 Red (Gray is optional)
- 3) Cable lead position "B"
- 4) 20" cable length
- 5) Maximum cable gauge of 1/0
- 6) Battery well : 33" x 13" x open

FEATURES LIST - MRW020E, MRW030E

PERFORMANCE	STD	OPT
24 Volt	●	
SEM traction control technology	●	
Energy efficient MOSFET traction/hoist controller	●	
Transistor hydraulics	●	
Auto deceleration system	●	
3 User programmable performance modes	●	
Creep speed control	●	
		●
DRIVE	STD	OPT
Drive tire		
- 10" x 5" press-on smooth polyurethane	●	
- 10" x 5" press-on siped polyurethane		●
4" x 2.8" tandem polyurethane load wheels	●	
LIFT	STD	OPT
Mast		
- 101" MFH / 72" OLH 2- stage		●
- 111" MFH / 77" OLH 2- stage		●
- 123" MFH / 83" OLH 2- stage	●	
- 141" MFH / 92" OLH 2- stage		●
- 149" MFH / 73" OLH 3- stage		●
- 164" MFH / 78" OLH 3- stage		●
- 179" MFH / 83" OLH 3- stage		●
Proportional lift/lowering	●	
HANDLING	STD	OPT
32.5" Carriage	●	
32.5" hook type integral sideshift carriage		●
48" high load backrest extension	●	
Without load backrest		●
Forks		
- 36" x 1.5" x 4.0" hook type - standard taper forks		●
- 42" x 1.5" x 4.0" hook type - standard taper forks	●	
- 48" x 1.5" x 4.0" hook type - standard taper forks		●
- Without forks		●
ERGONOMICS	STD	OPT
Ergonomically designed composite control handle	●	
Ergonomically designed cast aluminum control handle		●
OPERATION	STD	OPT
Key switch start	●	
Keyless toggle start with auxiliary key switch		●
Outriggers		
-35" Open end clearance with 43" outside dimension (overall width)	●	
-37" Open end clearance with 45" outside dimension (overall width)		●
-41" Open end clearance with 49" outside dimension (overall width)		●
-42" Open end clearance with 50" outside dimension (overall width)		●
-43" Open end clearance with 51" outside dimension (overall width)		●
-49" Open end clearance with 57" outside dimension (overall width)		●
Low battery lift interrupt without display	●	
Battery connector		
- 175 amp red	●	
- 175 amp grey		●
Multi-function display		
- Battery discharge indicator		●
- Hour meter		●
- Fault light		●
Electric horn	●	
Electro-magnetic park brake	●	
Traction reversing switch	●	

SUPPLEMENTAL	STD	OPT
12 months / no limit full truck warranty	●	
36 months / 6,000 hours powertrain warranty	●	
60 months / 10,000 hour frame warranty	●	
3 year 6,000 hour part A comprehensive parts and labor no deduct		●
5 year 10,000 hour part A comprehensive parts and labor no deduct		●
5 year 10,000 hour part B powertrain parts and labor no deduct		●
HY-Shield - part A extension to 3 years / 6,000 hours - part B extension to 5 years / 10,000 hours		●
Parts manual		
- CD		●
- printed		●
CONSTRUCTION	STD	OPT
UL Classification Type "E"	●	
Application/environmental construction		
- Standard environmental construction +32oF	●	
- Cold storage/freezer package to -15oF		●
33.0" x 13.5" battery compartment	●	
Lift out battery removal	●	
Side battery extraction - both sides		●
VISIBILITY	STD	OPT
Wire mesh screen	●	
Lexan shield - mast		●
ENERGY SYSTEM	STD	OPT
Set for flooded cell		●
Set for maintenance free		●

About Yale



Yale Lift Truck Technologies leverages over a century of material handling experience and substantial investment in innovation to bring the most advanced technology-driven lift truck solutions to market. The company offers a full line of award-winning lift trucks, including reach trucks, order pickers, turret trucks, pallet jacks and trucks, pallet stackers, tow tractors and counterbalanced forklifts, as well as powerful operator assist solutions, proven robotics and a wide range of power sources to help customers adapt to today's demanding supply chain. Yale and its independent dealer network support these solutions with comprehensive after-sales service, parts, financing and training.

MATERIALS HANDLING FOR:

Third-party logistics (3PL)

Auto parts distribution

Beverage

Cold & frozen foods

Food distribution

Food processing

Furniture & furnishings

Government

Health & pharma

Home centers & durables


Retail & e-commerce

Yale Lift Truck Technologies
P.O. Box 7367
Greenville, NC 27835-7367
U.S.A.

yale.com



EXPLORE MORE
ONLINE.
←

© 2023 Hyster-Yale Group, Inc., all rights reserved. YALE and  are trademarks of Hyster-Yale Group, Inc.

Trucks may be shown with optional equipment and/or features not available in all regions. Truck performance may be affected by the condition of the vehicle, how it is equipped and the application. Specifications are subject to change without notice. Consult your Yale® Dealer if any of the information shown is critical to your application.

CERTIFICATION: Yale lift trucks meet the design and construction requirements of B56.1-1969, per OSHA Section 1910.178(a)(2), and also comply with the B56.1 revision in effect at time of manufacture. Classified by Underwriters' Laboratories, Inc.